


Recommend PCB Layout

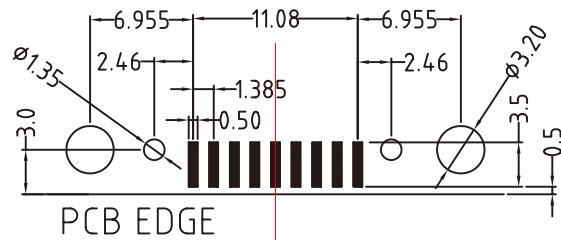

ELECTRICAL CHARACTERISTICS

Contact Current Rating:1Amperes.
 Dielectric Withstanding Voltage:AC 500V at sea level.
 Insulation Resistance:1000Megohms Min.
 Contact Resistance:30Milliohms Max.
 Operation Temperature : -55°C to +105°C.

Material

Contact :Copper Alloy.
 Insulator:LCP. [Select PA6T /PA9T]
 Shell: SPCC.
 Z-Piece: Copper Alloy.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE

SIZE A4

P PROJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

DW-PNZ1-09-LF
 SERIES | CLIP | NUT | MALE | LEADFREE | 09 WAY

DESCRIPTION: