




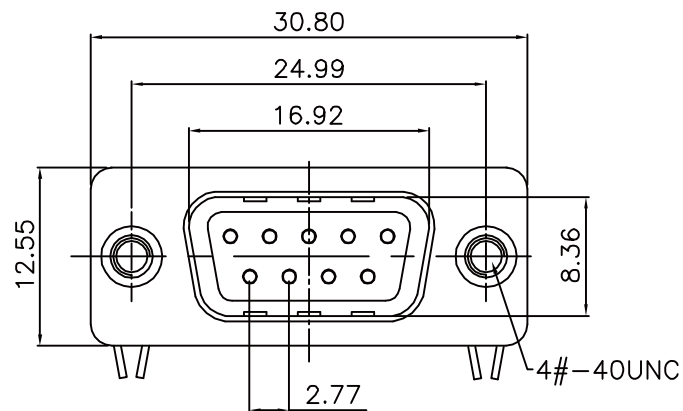


1. Material:

Contact: Copper Alloy
 Insulator: LCP, UL94V-0
 Shell: SPCC.
 Harpoon: Copper Alloy.
 Rivet: Copper Alloy.
 Screw: Brass

2. Specification:

Contact Rating: 1 A, 30V DC
 Dielectric Withstanding Voltage: AC 500V at sea level.
 Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 Operation Temperature: -55°C to +105°C.

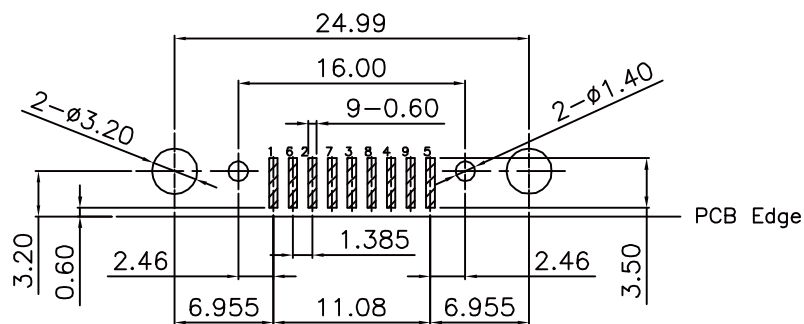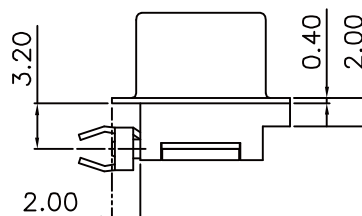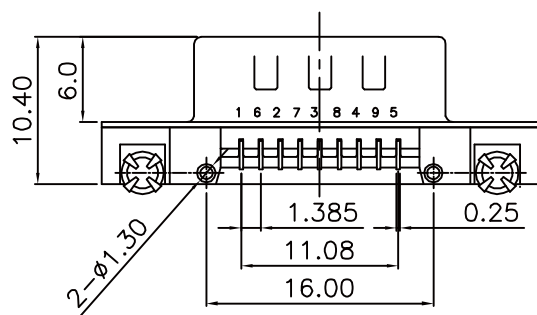

Recommended PCB Layout

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 X ± 0.30
 .XX ± 0.20
 .XXX ± 0.05
 ANG ± 3°



ORDER INFORMATION

DW-PNZ4-09-LF
 SERIES | CLIP | LEADFREE
 NUT | 09WAY
 MALE

DESCRIPTION: D-SUB Slim , Male, SMD

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com