


MATERIAL
 HOUSING : HIGH TEMPERATURE HOUSING
 NY-9T (UL94V-0) WITHSTANDS IR AND
 VPR SOLDERING METHODS.
 CONTACTS : PHOSPHOR BRONZE.
 PLATING : SELECTIVE GOLD PLATED.

SPECIFICATION
 CURRENT RATING : 1AMP.
 INSULATOR RESISTANCE 5000MΩ MIN. AT DC 500V.
 CONTACT RESISTANCE : 20MΩ MAX. AT DC 100mA.
 OPERATING TEMPERATURE : -65°C~+125°C.
 MAX PROCESSING TEMPERATURE: 260±10°C FOR 3~5 SECONDS.

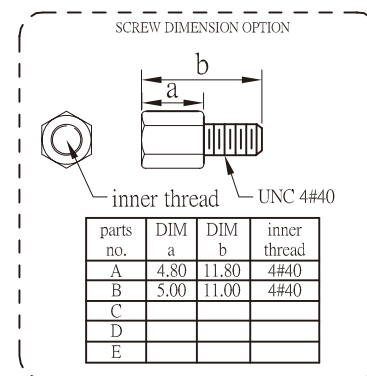

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±
 .X ± 0.50
 .XX ± 0.20
 .XXX ± 0.30
 ANG ± 3°

照片框

ORDER INFORMATION

DW-SNZ1H-09-LF
 SERIES | LEADFREE
 | 09WAY
 | HEX SCREW
 | CLIP
 | NUT
 | FEMALE

DESCRIPTION: D-SUB CONNECTOR SLIM SMT TYPE (1.20mm) 09 FEMALE