

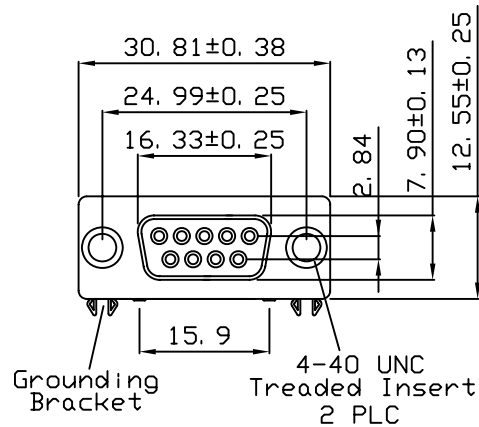
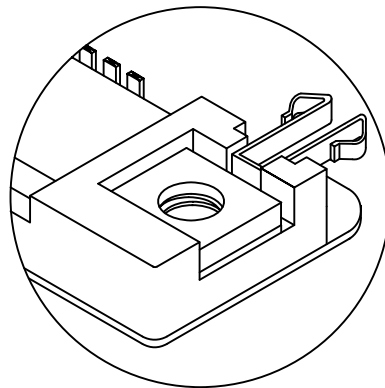
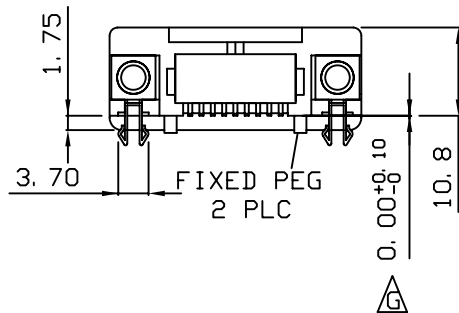


Pin Number :
1 6 2 7 3 8 4 9 5
Recommended PCB Layout

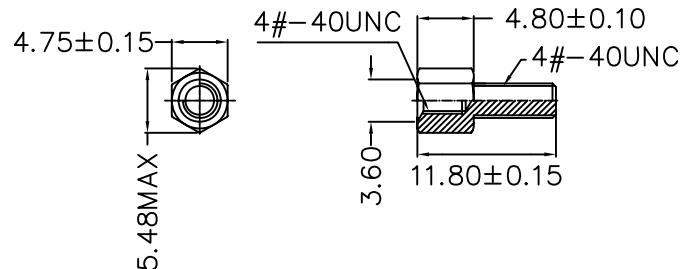

Fork Board Lock Type

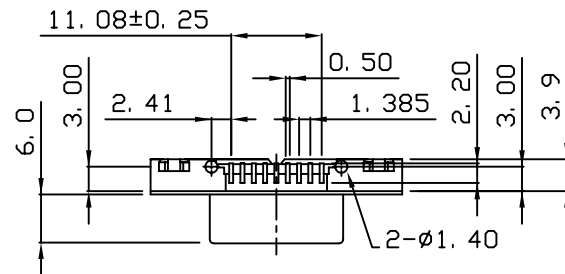

Material And Finish
Shell -Steel zinc plated or tin plated
Bracket-Brass strip-H nickel plated
Screw-Brass nickel plated
Insulator-NYLON 6T fiber reinforced UL-94V0,color black
Contact Material- Socket-Phosphor bronze
Duplex plated as follows:
A-. 000030[, 00076]gold on mating end, tin-lead on termination end, with entire contact nickel
B-. 000015[, 00038]gold on mating end, tin-lead on termination end, with entire contact nickel
C-Gold flash on mating end, tin-lead on termination end, with entire contact nickel

Specifications
Rated current 5A
Rated Voltage 300V DC
Withstanding Voltage 500V(r.m.s) AC for 1 minute
Insulation Resistance more than 1000M ohm at 500V DC
Contact Resistance 13m ohm Max
Dielectric Strength 1000V AC Min for 1 minute
Temperature -55 °C~+105 °C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

DW-SNZ2H-09-LF
SERIES | | | LEADFREE
| | | 09 WAY
| | | HEX SCREW
| | | CLIP
| | | NUT
| | | FEMALE

DESCRIPTION: D SUB RIGHT ANGLE SURFACE-MOUNT CONNECTORS
DSMT1-SERIES LOW PROFILE 9 POST FEMALE