

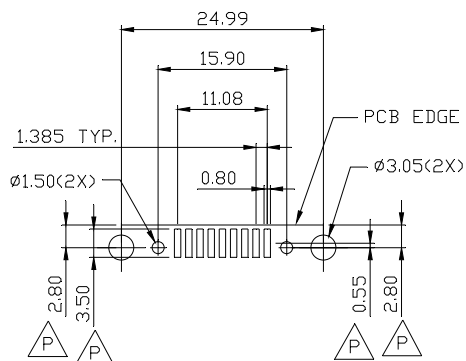
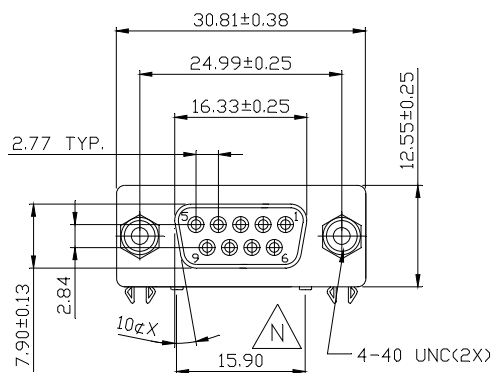
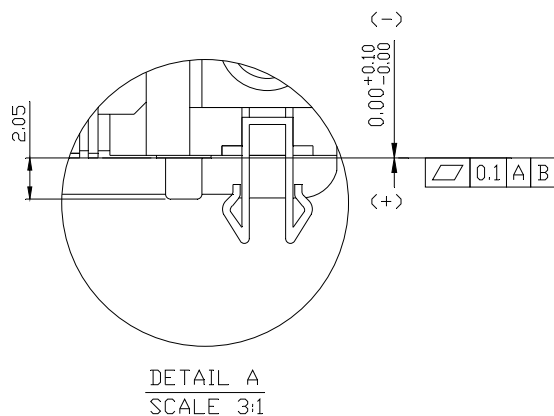


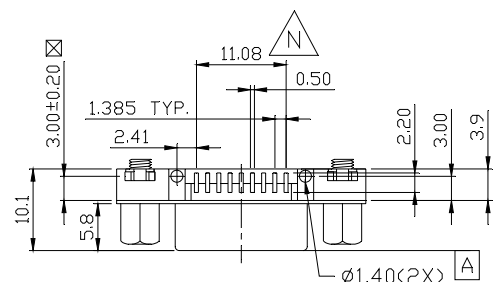

PIN NUMBER:
1 6 2 7 3 8 4 9 5

RECOMMENDED PCB LAYOUT

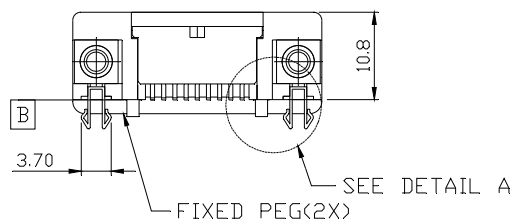

NOTES:

1.MATERIAL:

HOUSING:NYLON 6T,30% GLASS FILLED,UL94-V0

COLOR:BLACK

TERMINAL:0.25mm THICKNESS,PHOSPHOR BRONZE C5191H

METAL SHELL:0.40mm THICKNESS,SPCC

BOARD LOCK & NUT & SCREW:BRASS

2.PLATING:

TERMINAL:

CONTACT AREA:SELECTIVE GOLD(Au) PLATING

SOLDER TAIL:N/A-SERIES:TIN-LEAD(Sn-Pb) ALLOY

THICKNESS=75 MICROINCH MINIMUM

ROHS-SERIES:TIN(Sn),THICKNESS=100 MICROINCH MINIMUM

UNDER PLATE:NICKEL(Ni),THICKNESS=50 MICROINCH MIN./1.27 MICROMETER MIN.

METAL SHELL:

N/A-SERIES:TIN(Sn),THICKNESS=80 MICROINCH MIN./2.032 MICROMETER MIN.

NICKEL(Ni),THICKNESS=50 MICROINCH MIN./1.27 MICROMETER MIN.

UNDER PLATE:COPPER(Cu),THICKNESS=50 MICROINCH MIN./1.27 MICROMETER MIN.

ROHS-SERIES:NICKEL(Ni),THICKNESS=80 MICROINCH MIN./2.032 MICROMETER MIN.

UNDER PLATE:COPPER(Cu),THICKNESS=40 MICROINCH MIN./1.016 MICROMETER MIN.

BOARD LOCK:TIN(Sn),THICKNESS=50 MICROINCH MIN./1.27 MICROMETER MIN.

NUT & SCREW:NICKEL(Ni),THICKNESS=50 MICROINCH MIN./1.27 MICROMETER MIN.

3.RECOMMENDED PCB THICKNESS:1.60+/-0.05mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DW-SNZ2J-09-LF
SERIES | | | LEADFREE
| | | 09 WAY
| | | JACKSCREW
| | | CLIP
| | | NUT
| | | FEMALE

DESCRIPTION: D SUBMINIATURE,RIGHT ANGLE
SURFACE-MOUNT LOW PROFILE 9 POSITION, FEMALE