
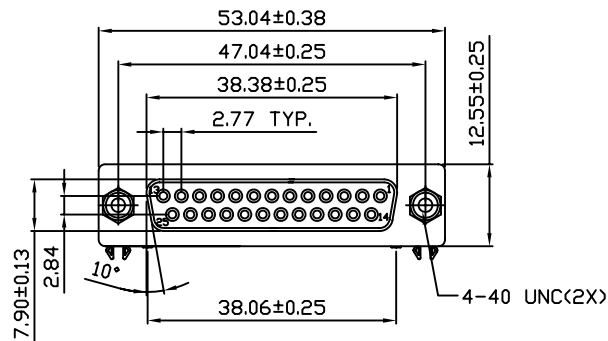
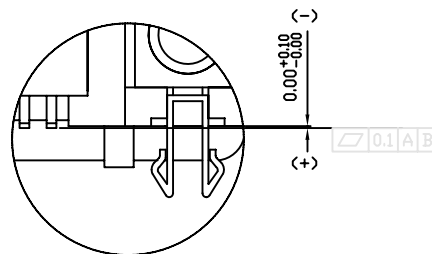



PIN NUMBER:
1 14 2 15 3 16 4 17 5 18 6 19 7 20 8 21 9 22 10 23 11 24 12 25 13

RECOMMENDED PCB LAYOUT

NOTES:
1.MATERIAL:
HOUSING:NYLON 6T,30% GLASS FILLED,UL94-V0
COLOR:BLACK OR BURGUNDY
TERMINAL:0.25mm THICKNESS,PHOSPHOR BRONZE C5191H
METAL SHELL:0.40mm THICKNESS,SPCC
BOARD LOCK & NUT & SCREW:BRASS
2.PLATING:
TERMINAL:
CONTACT AREA:SELECTIVE GOLD(Au) PLATING
SOLDER TAIL:N/A-SERIES:TIN-LEAD(Sn-Pb) ALLOY,THICKNESS=75 MICROINCH MINIMUM
ROHS-SERIES:TIN(Sn),THICKNESS=100 MICROINCH MINIMUM
UNDER PLATE:NICKEL(NI),THICKNESS=50 MICROINCH MIN./1.27 MICROMETER MIN.
METAL SHELL:
N/A-SERIES:TIN(Sn),THICKNESS=80 MICROINCH MIN./2.03 MICROMETER MIN.
NICKEL(NI),THICKNESS=50 MICROINCH MIN./1.27 MICROMETER MIN.
UNDER PLATE:COPPER(Cu),THICKNESS=50 MICROINCH MIN./1.27 MICROMETER MIN.
ROHS-SERIES:NICKEL(NI),THICKNESS=80 MICROINCH MIN./2.03 MICROMETER MIN.
UNDER PLATE:COPPER(Cu),THICKNESS=40 MICROINCH MIN./1.016 MICROMETER MIN.
BOARD LOCK:TIN(Sn),THICKNESS=50 MICROINCH MIN./1.27 MICROMETER MIN.
NUT & SCREW:NICKEL(NI),THICKNESS=50 MICROINCH MIN./1.27 MICROMETER MIN.
3.RECOMMENDED PCB THICKNESS:1.60+/-0.05mm

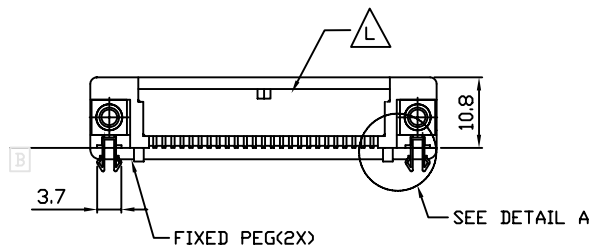

DETAIL A
SCALE 3:1

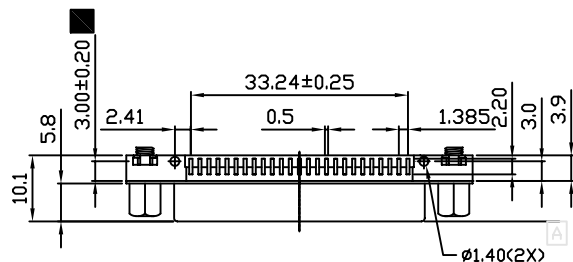

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DW-SNZ2J-25-LF
SERIES | | | LEADFREE
| | | 25 WAY
| | | JACKSCREW
| | | CLIP
| | | NUT
| | | FEMALE

DESCRIPTION: