



ELECTRICAL CHARACTERISTICS



Contact Current Rating: 1Amperes.
 Dielectric Withstanding Voltage: AC 500V at sea level.
 Insulation Resistance: 1000Megohms Min.
 Contact Resistance: 30Milliohms Max.
 Operation Temperature : -55°C to +105°C.

Material


Contact : Copper Alloy.
 Insulator: LCP. (Select PA6T /PA9T)
 Shell: SPCC.
 Z-Piece: Copper Alloy.

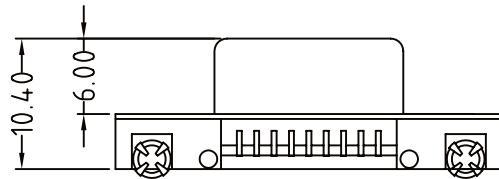

RECOMMEND PCB LAYOUT

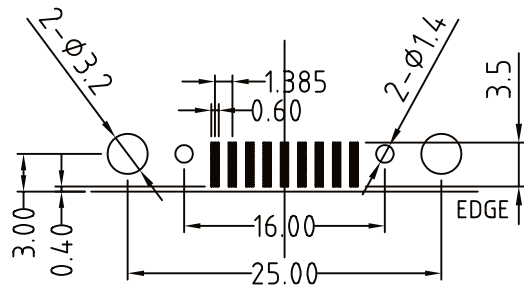

DW-SNJZ4-09

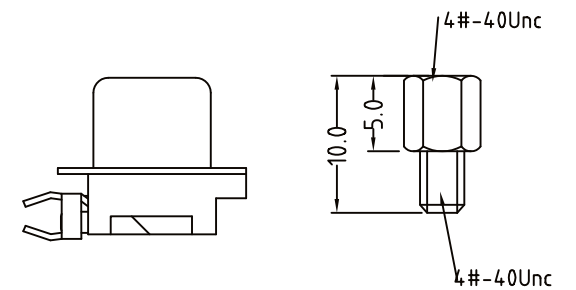

DW-SNHZ4-09

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE


SIZE A4

P PROJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

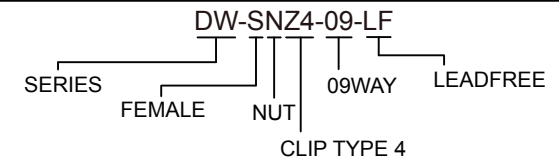

DESCRIPTION: