


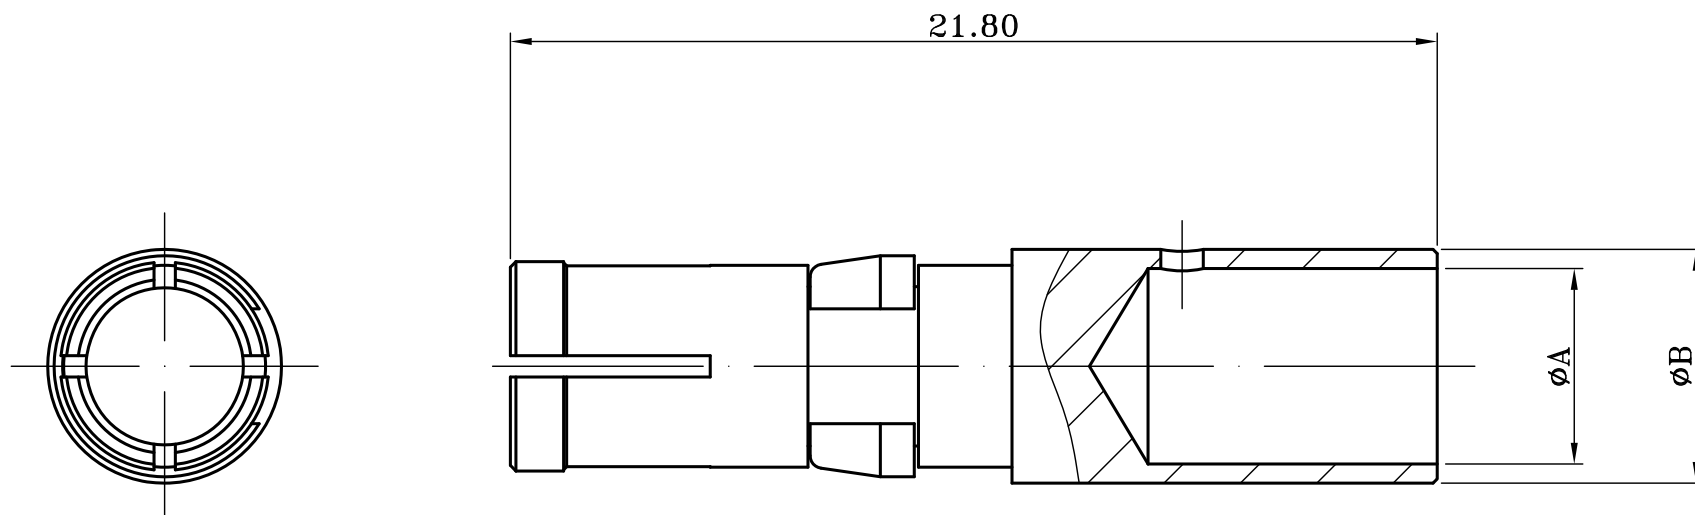

NOTE:

1. CONTACTS: PRECISION MACHINED COPPER ALLOY
2. CONTACT RESISTANCE : 1.0 m Ω MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE
TEMPERATURE RATING : -55°C ~ +125°C

CURRENT RATING	ϕA	ϕB	PART NO.
10 A	1.7	2.5	DWC-F-10
20 A	2.7	3.6	DWC-F-20
30 A	3.5	4.4	DWC-F-30
40 A	4.6	5.5	DWC-F-40

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$ 0.40

.X $\pm$ 0.30

.XX $\pm$ 0.20

.XXX $\pm$ 0.10

ANG $\pm$ 5°

PPOJECTION

照片框

ORDER INFORMATION

DWC-F-xx-LF

SERIES

LEADFREE

10:10AMP

20:20AMP

30:30AMP

40:40AMP

FEMALE TERMINAL

DESCRIPTION: