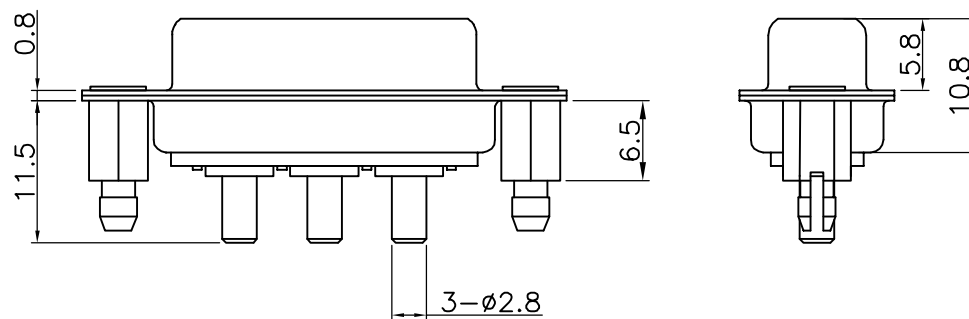
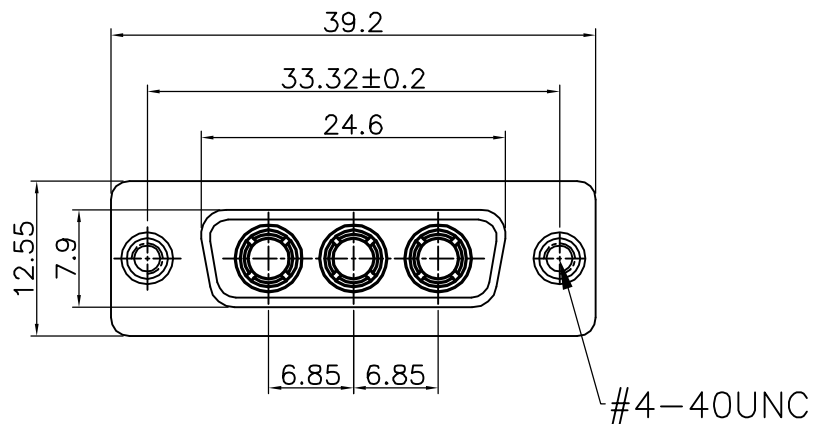


PCB LAYOUT

1. Materials:

Shell: Steel Material, Nickel Plated.

Insulator: PBT+30% Glass Filled, Thermoplastic, UL 94V-0

Contact: Copper Alloy, Gold Flash Plated.

Boardlock: Brass, Nickel Plated.

Lockring: Brass, Nickel Plated.

Bracket: Steel, Nickel Plated.

2. Specifications:

Dielectric Withstanding Voltage: AC 1000V r.m.s.

Insulation Resistance: 5000 Megohms Min.

Contact Resistance: 2.7 Milliohms Max.

Temperature Rating: -55°C ~ +155°C

Insertion Force: 4.5 Kgf. Max.

Withdrawal Force: 0.3 kgf Min.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

DWD-S20Z-03W3-LF
SERIES CLIP 17W2 LEADFREE
20 AMPS
FEMALE

DESCRIPTION: 3W3, FEMALE, DIP TYPE 180°