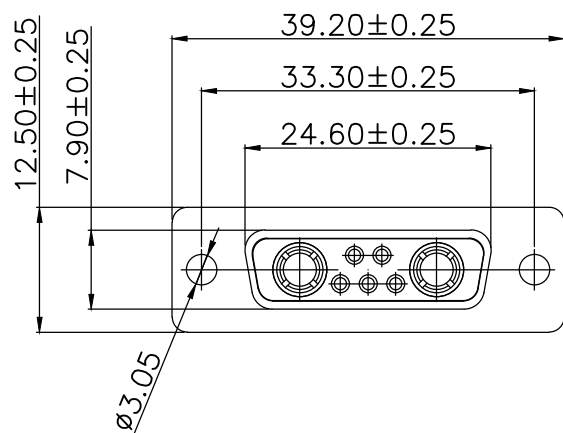


Recommended PCB Layout

1. Materials:

Housing: PBT,

Terminal: Copper Alloy, Gold Plated On Contact Area.

Tin Plated On Solder Tails.

Nickel Underplated Overall.

Shell: Copper Alloy, Tin Plated.

2. Specifications:

Current Rating: 1 Amp Max.

Dielectric Withstanding: 100V AC For One Minute

Contact Resistance: 30m Ohms Max

Insulation Resistance: 100M Ohms Min At DC 500V

Operation Temperature: -25°C ~ +105°C

Part No.	Current Rating	Dim. ØA	Dim. ØB
DWD-S10-07W2	10A	Ø1.7	Ø2.2
DWD-S20-07W2	20A	Ø2.8	Ø3.3
DWD-S40-07W2	40A	Ø3.75	Ø4.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DWD-Sxx-07W2-LF

SERIES

07W2

40:40 AMPS

20:20 AMPS

10:10 AMPS

FEMALE

LEADFREE

DESCRIPTION: