
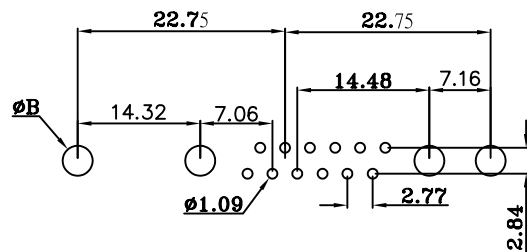


PART NO.	Current Rating	Dimension	Dimension
		Ø A	ØB
DWD-S40E4-17W5	40 AMPS	Ø3.75	Ø4.20
DWD-S20E4-17W5	20 AMPS	Ø2.8	Ø3.28
DWD-S10E4-17W5	10 AMPS	Ø1.7	Ø2.20

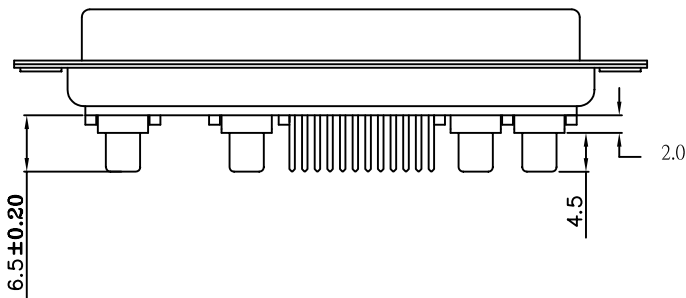

PCB LAYOUT

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
 CONNECTOR INSULATOR : PBT THERMOPLASTIC,
 30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
 SIGNAL CONTACT MATERIAL: BRASS, FULL GOLD FLASH
 HIGH POWER CONTACT MATERIAL: BRASS, 15u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,OR40 AMPS
 HIGH POWER CONTACT RESISTANCE : 75 OHM MAX.
 DIELECTRIC WITHSTANDING VOLTAGE :
 1000 V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +125°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION

照片框

ORDER INFORMATION

DWD-SxxE4-17W5-LF
 SERIES | | LEADFREE
 | | 17W5
 | | EMPTY #4
 FEMALE | 10 AMPS
 | 20 AMPS
 | 40 AMPS

DESCRIPTION: (Power Contact Straight DIP Type)

煜倫股份有限公司

www.morethanall.com