
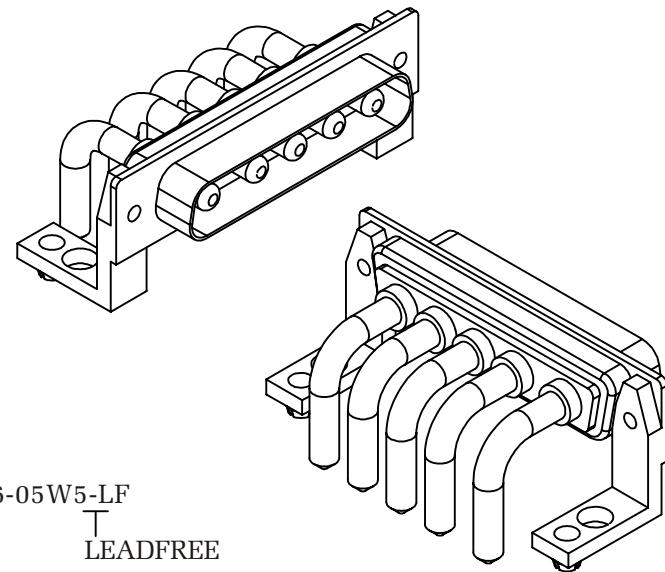


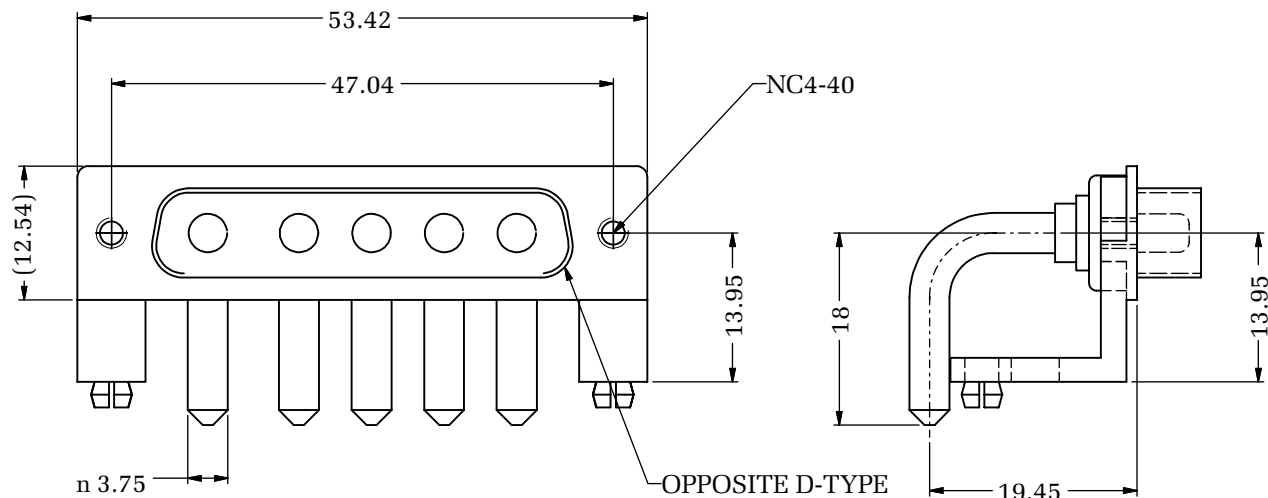

DWL-P40ZNS76-05W5-LF
LEADFREE


RoHS Compliant

NOTES:

1. TYPE - 5W5, CRIMP CONTACTS
2. HIGH POWER CONTACTS FOR SOLDER PIN ANGLED - PLUG.
3. CURRENT RATING 40A
4. MOUNTING STYLE- METAL BRACKET WITH THREADED INSERT
UNC4-40 AND CLIP FOR PCB n 3.1 FOR 14.55mm AND HOLE n 4.5mm FOR 9.55mm

Performance data :

1. High power contact current rating :
20 or 40 Amps.
2. High power contact resistance :
<2.7mΩ
3. Dielectric withstanding voltage :
1000VAC for one minute.
4. Insulation resistance : >5000MΩ
5. Connector mating and unmating force :
17.0kgf max.
6. Durability : 100 cycles.
7. Operating temperature : -55°C~+125°C

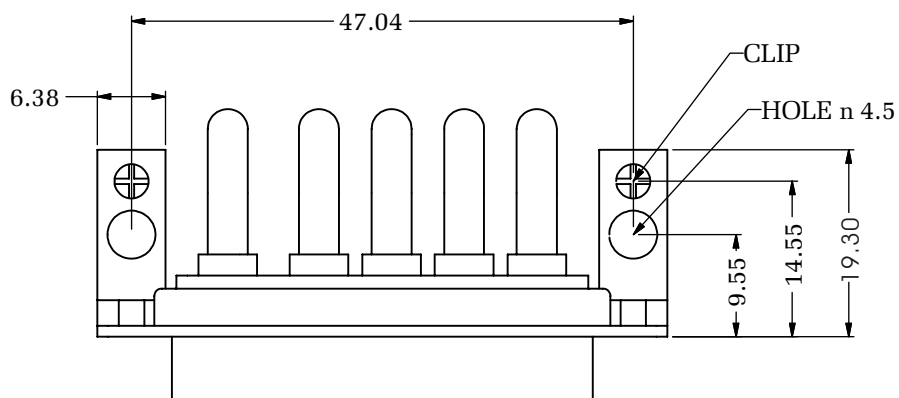

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. DWL-P40ZNS76-05W5-LF

DWG NO. DWL-P40ZNS76-05W5-LF

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

AREA

D-TYPE 5W5 MALE R/A
POWER CONNECTOR

REVISIONS

HK

DATE