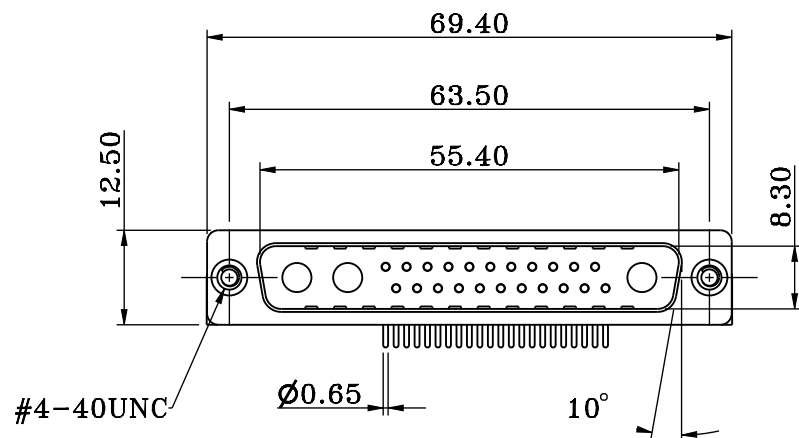


P.C.B. LAYOUT

MATERIALS AND FINISH

SHELL: STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
BACK SHELL NICKEL FINISHED
DIMPLES ON PLUG ONLY

INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED
UL 94V-0 RATED, BLACK COLOR

CONTACT: PRECISION MACHINED COPPER ALLOY
FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 A
CONTACT RESISTANCE : 10 mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 5GΩ MIN.
TEMPERATURE RATING : -55°C ~ +125°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.20

.X ± 0.10

.XX ± 0.05

.XXX ± 0.03

ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

DWR-P00LN-25W3-LF

SERIES
NUT
BRACKET
MALE
25W3
LEADFREE

DESCRIPTION: