
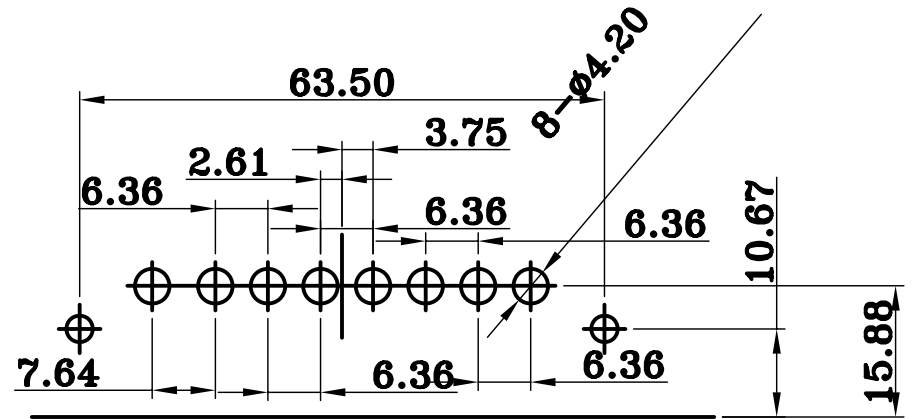


**MATERIALS AND FINISH**  
 SHELL : STEEL MATERIAL, TIN FINISHED  
 DIMPLES ON PLUG O  
 CONNECTOR INSULATOR : PBT THERMOPLASTIC,  
 30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR  
 HIGH POWER CONTACT MATERIAL: BRASS, 15u" GOLD PLATED

**ELECTRICAL CHARACTERISTICS**

HIGH POWER CONTACT CURRENT RATING :10,20,OR 40 AMPS  
 HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.  
 DIELECTRIC WITHSTANDING VOLTAGE :  
 1000 V AC FOR 1 MINUTE  
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.  
 TEMPERATURE RATING : -55°C ~ +125°C

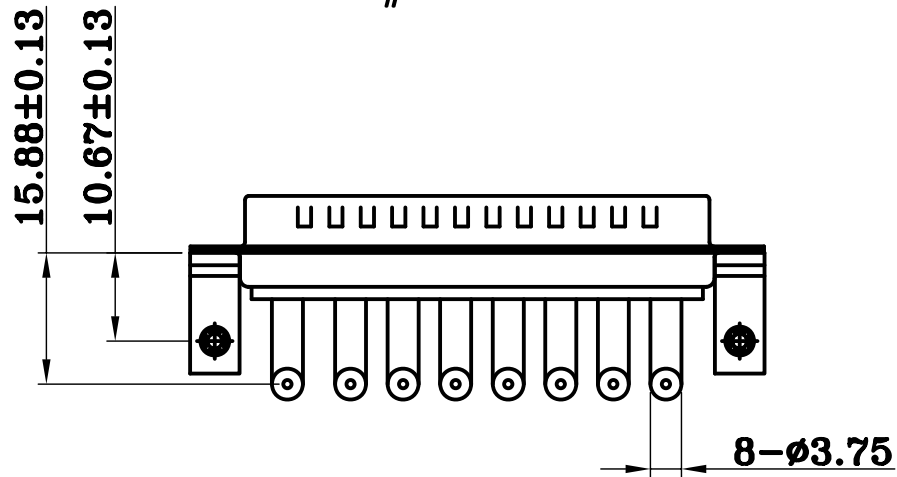

**PCB LAYOUT**

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X.±  
 .X±  
 .XX±  
 .XXX±  
 ANG ±

PJECTION

照片框

ORDER INFORMATION

DWR-P40ZN-08W8-LF  
 SERIES | LEADFREE  
 | 08W8  
 | CLIP+NUT  
 | 40AMP  
 MALE

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com