
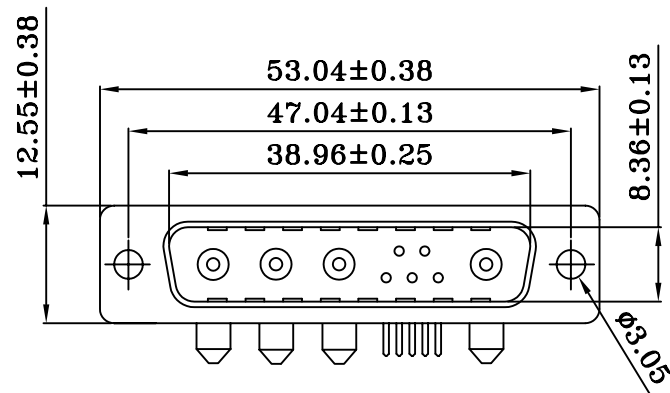


PART NO.	Current Rating	Dimension	Dimension
		Ø A	ØB
DWR-P40-09W4	40 AMPS	Ø3.75	Ø4.20
DWR-P20-09W4	20 AMPS	Ø2.8	Ø3.28
DWR-P10-09W4	10 AMPS	Ø1.7	Ø2.20

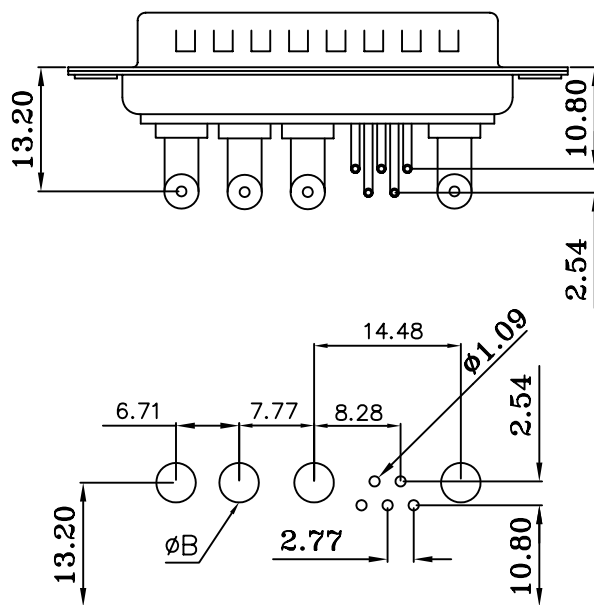

PCB LAYOUT

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
CONNECTOR INSULATOR : PBT THERMOPLASTIC,
30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
SIGNAL CONTACT MATERIAL: BRASS, FULL GOLD FLASH
HIGH POWER CONTACT MATERIAL: BRASS, 15u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,OR 40 AMPS
HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE :
1000 V AC FOR 1 MINUTE
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +125°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DWR-Pxx-09W4-LF

SERIES

09W4

LEADFREE

10:10Amps
20:20Amps
40:40Amps

MALE

DESCRIPTION: D-SUB CONNECTOR (Power Contact Right Angle DIP Type)