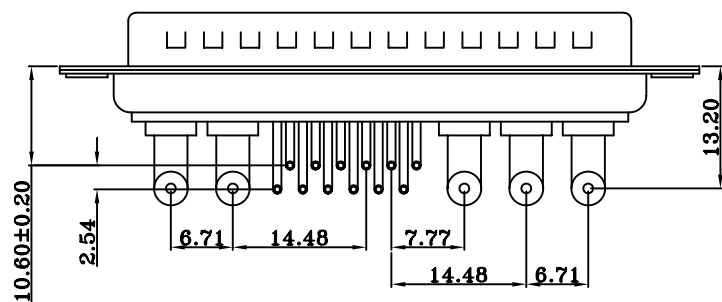

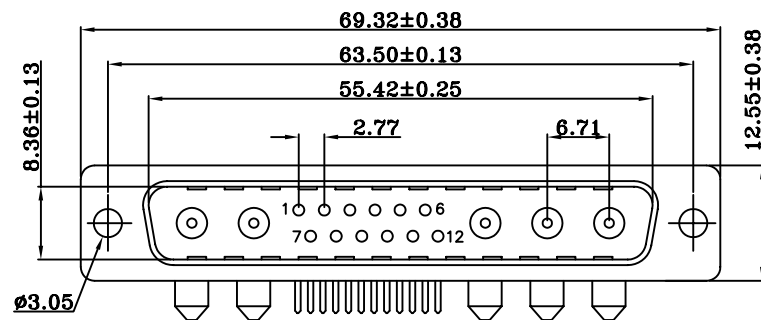


PCB LAYOUT

PART NO.	Current Rating	Dimension	Dimension
		Ø A	ØB
DWR-P40-17W5	40 AMPS	Ø3.75	Ø4.20
DWR-P20-17W5	20 AMPS	Ø2.8	Ø3.28
DWR-P10-17W5	10 AMPS	Ø1.7	Ø2.20

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED

DIMPLES ON PLUG ONLY

CONNECTOR INSULATOR : PBT THERMOPLASTIC,
30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR

SIGNAL CONTACT MATERIAL: BRASS, FULL GOLD FLASH

HIGH POWER CONTACT MATERIAL: BRASS, 15u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,OR40 AMPS

HIGH POWER CONTACT RESISTANCE : 75 OHM MAX.

DIELECTRIC WITHSTANDING VOLTAGE :

1000 V AC FOR 1 MINUTE

INSULATION RESISTANCE : 5000 MEGAOHMS MIN.

TEMPERATURE RATING : -55°C ~ +125°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DWR-Pxx-17W5-LF

SERIES

LEADFREE

17W5

10:10Amps

20:20Amps

40:40Amps

MALE

DESCRIPTION: D-SUB CONNECTOR (Power Contact R/A DIP Type)