


Table 1 Material	
Power Contact	Brass
Signal Contact	Brass
Metal Shell	Steel/Dimples on Plug only
Insulator	UL94V-0 Thermoplastic 30% glass filled

Table 2 Finish	
Power Contact	Gold-plated
Signal Contact	Gold-plated
Metal Shell	Tin or nickel plated

Table 3 Electrical Data	
Current Rating	
Signal Contact	5 Amp
Power Contact	10 - 40 Amp
Operating Temperature	-55°C - +125°C
Insulator Resistance	Minimum 5000 MΩ
Contact Resistance	Maximum 10mΩ
Dielectric w/standing Volt	1000 V AC per min

Table 4 Dimension & Current Rating		
Current Rating	Dimension	
	øA	øB
40 AMPS	ø3.75	ø4.20
30 AMPS	ø3.20	ø3.65
20 AMPS	ø2.80	ø3.28
10 AMPS	ø1.70	ø2.20

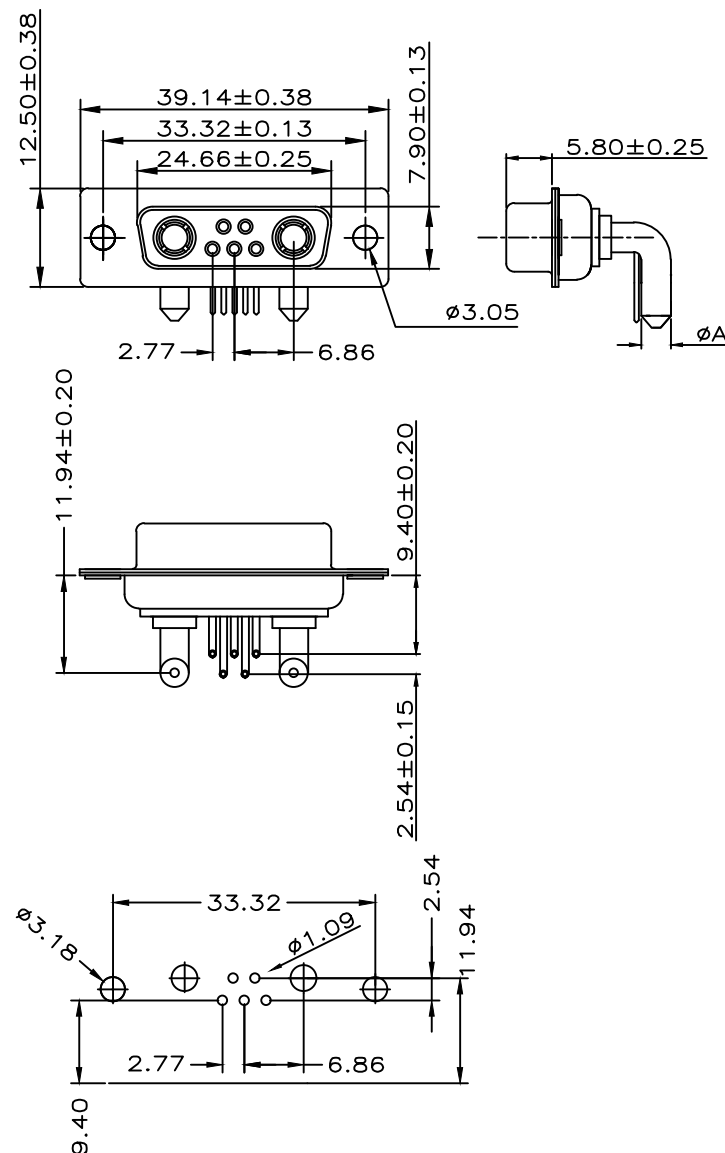

PCB LAYOUT

照片框

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG ±

ORDER INFORMATION

DWR-Sxx-07W2-LF

SERIES

LEADFREE

07W2

FEMALE

40:40 AMPS

30:30 AMPS

20:20 AMPS

10:10 AMPS

DESCRIPTION: D-SUB POWER SERIES 7W2 R/A Type