


NOTE:

- CONTACTS: PRECISION MACHINED COPPER ALLOY
- CONTACT RESISTANCE : 1.0 mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE
TEMPERATURE RATING : -55°C ~ +125°C

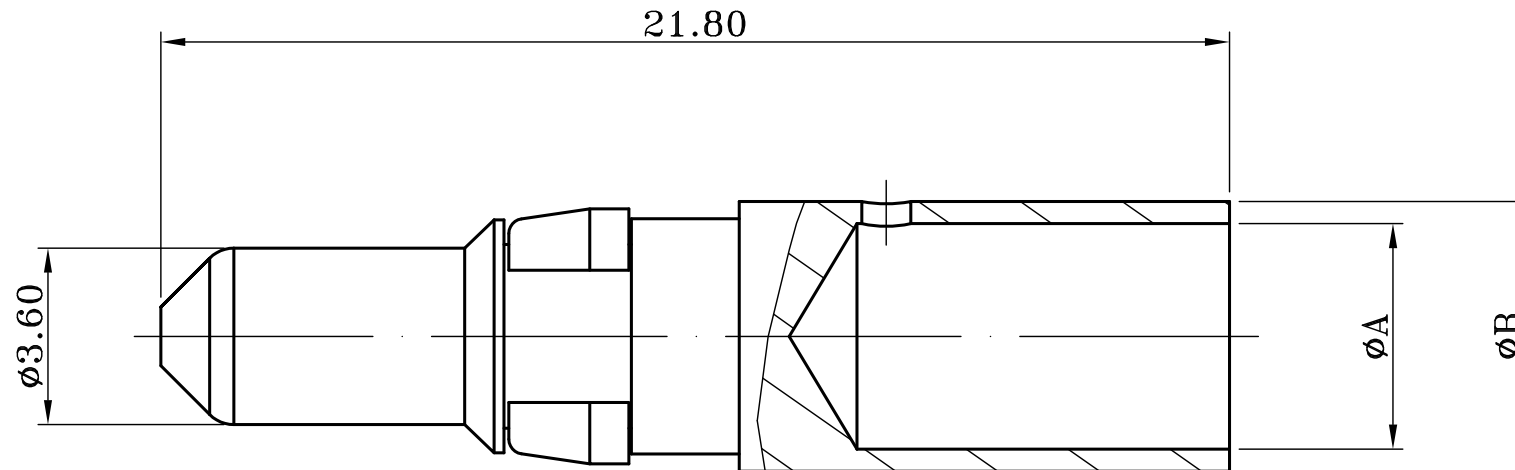

CURRENT RATING	φA	φB	PART NO.
10 A	1.7	2.5	DWS-M-10
20 A	2.7	3.6	DWS-M-20
30 A	3.5	4.4	DWS-M-30
40 A	4.6	5.5	DWS-M-40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

DWS-M-xx-LF
SERIES T LEADFREE
40:40AMP
30:30AMP
20:20AMP
10:10AMP
MALE

DESCRIPTION: