
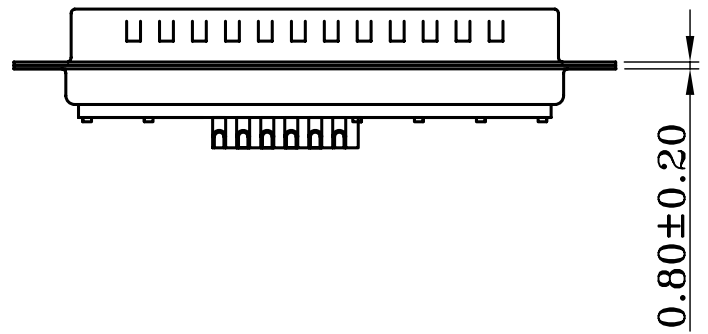
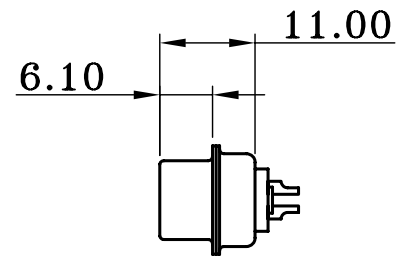


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

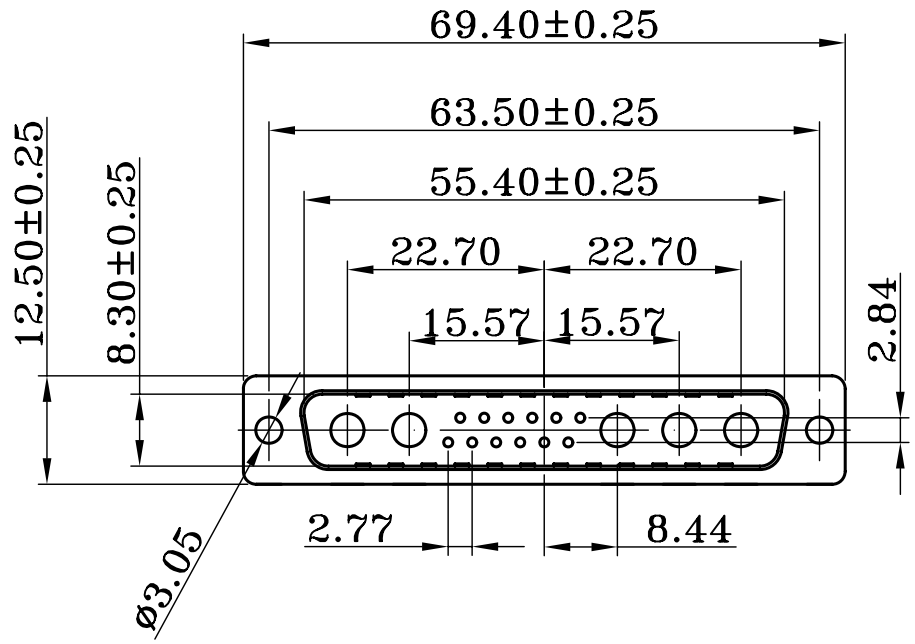

DWS-P-17W5-LF
LEADFREE
RoHS Compliant

MATERIALS AND FINISH
 SHELL : STEEL MATERIAL, FRONT SHELL TIN FINISHED
 BACK SHELL TIN FINISHED
 DIMPLES ON PLUG ONLY
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED,
 UL 94V-0 RATED, BLACK COLOR
 SIGNAL CONTACT : COPPER ALLOY, 30u" GOLD PLATED

ELECTRICAL CHARACTERISTICS
 SIGNAL CONTACT CURRENT RATING : 5.0 AMPS
 SIGNAL CONTACT RESISTANCE : 2.7 mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 5GΩ MIN.
 TEMPERATURE RATING : -55°C ~ +125°C

	PART NO. DWS-P-17W5		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:			
	DWG NO. DWS-P-17W5							
焯倫股份有限公司	FILE NO.		PROJECTION	AREA	REVISIONS	HK	DATE	
	UNIT / mm	SCALE 1:1						