
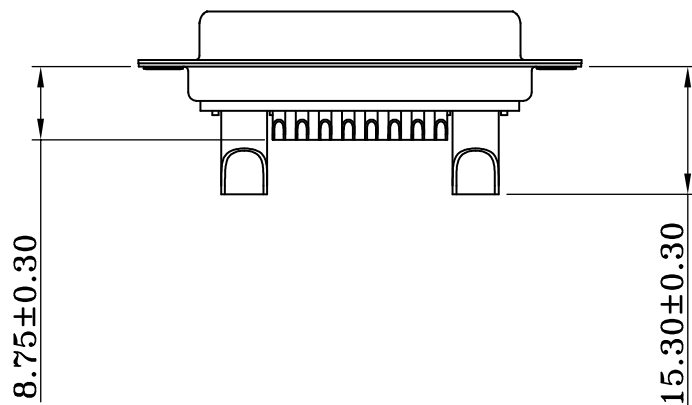
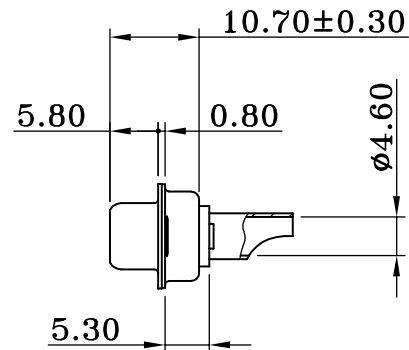


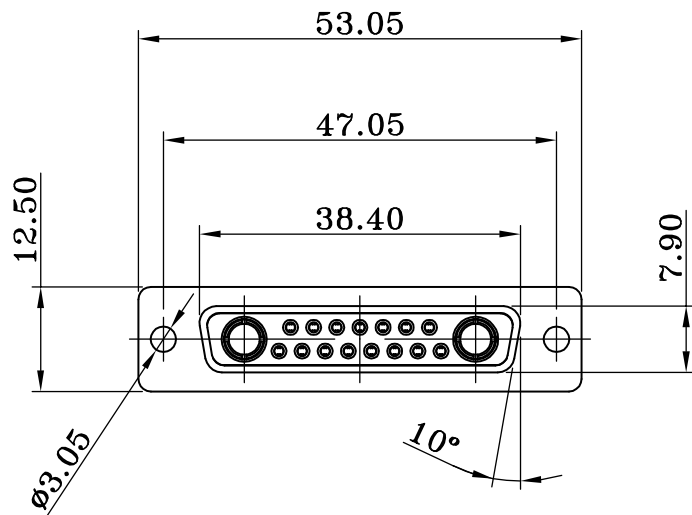

MATERIALS AND FINISH

SHELL: STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
BACK SHELL NICKEL FINISHED
DIMPLES ON PLUG ONLY

INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED,
UL 94V-0 RATED, BLACK COLOR

SIGNAL CONTACT: COPPER ALLOY, FULL GOLD FLASH

HIGH POWER CONTACT: COPPER ALLOY, FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING : 40 A

HIGH POWER CONTACT RESISTANCE : 1.0 mΩ MAX.

SIGNAL CONTACT CURRENT RATING : 5.0 A

SIGNAL CONTACT RESISTANCE : 10 mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE

INSULATION RESISTANCE : 5GΩ MIN.

TEMPERATURE RATING : -55°C ~ +125°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DWS-S40-17W2-LF
SERIES 17W2 LEADFREE
40Amps
FEMALE

DESCRIPTION: