


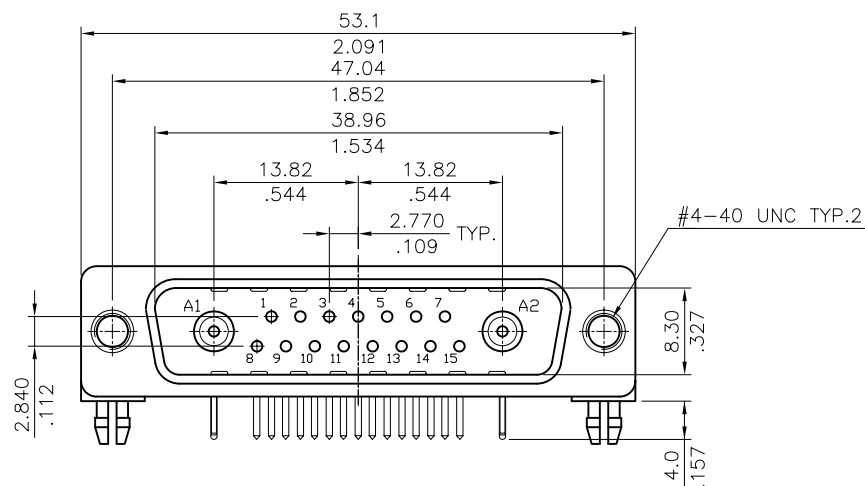

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy




Shell: Steel, Tin plated as standard

Coaxial terminal

Insulator: Teflon UL 94V-0

Color white

Contact: Brass

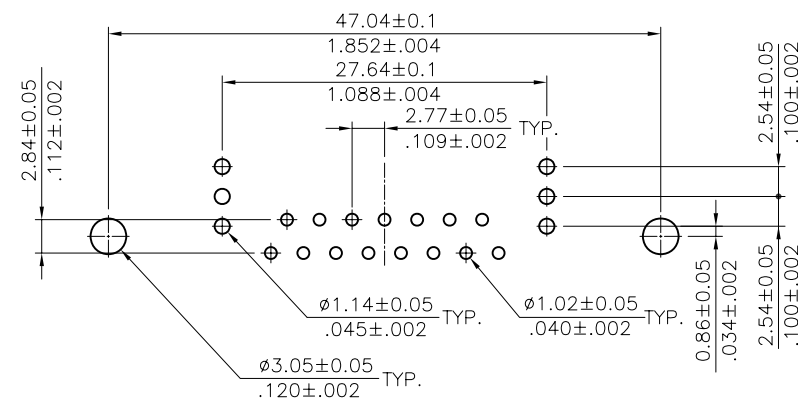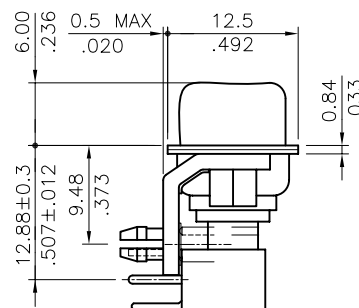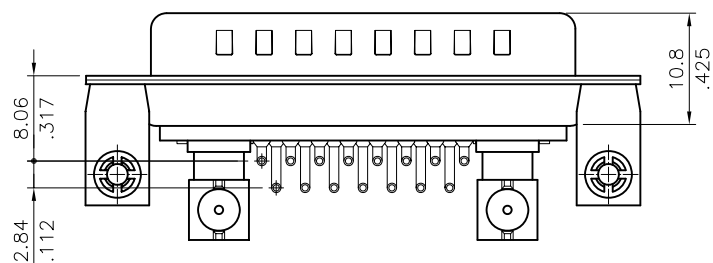

Recommended P.C Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

DXD-P50ZN-17W2-LF

SERIES

17W2

LEADFREE

NUT

CLIP

50:50 OHM

MALE

DESCRIPTION: