


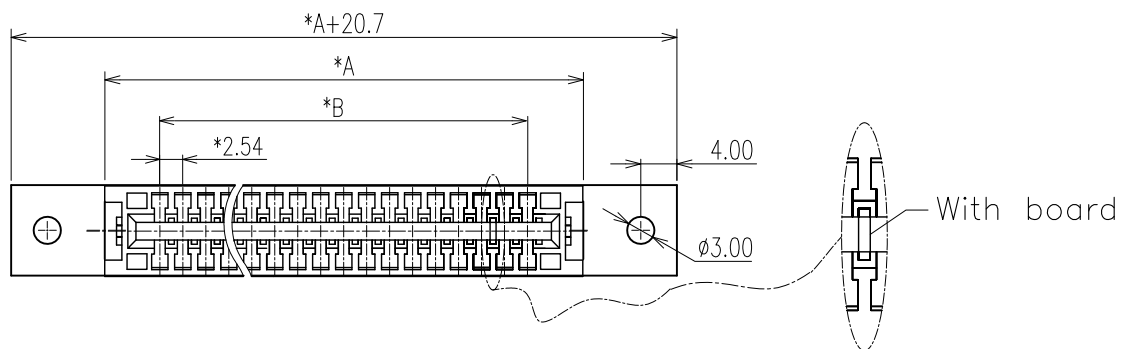

with whole circular hole Type

Specifications:

Current Rating:1.0 Amp

Contact resistance:20m Ohm Max. at 6V DC 0.3A

Insulator resistance:1000M ohm min. at 500V DC

Withstanding Voltage:500V AC/Minute

Operating Temperature Range:-55°~+105°C

Wire Size Flat Cable I.D.C: 1.27mm Pitch

AWG#28(standard) OR #30 (solid).

Material And Finish


Insulator:PBT&Glass-fiber reinforced UL94V-0

Insulator Color:Black

Contact:Phosphor Bronze or Brass

Contact Plating:See Contact Plating Tab.

Note:(*)Marked is Important DIM For QC.

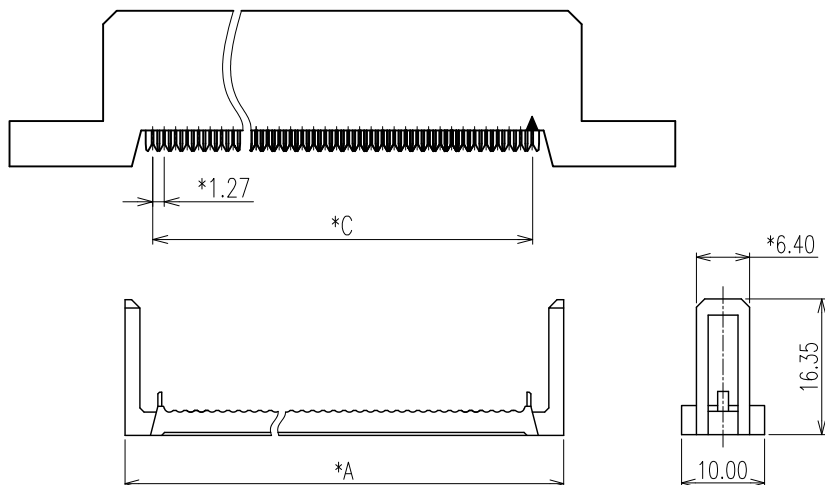

No. of Positions

No.	A	B	C
10	22.36	10.16	11.43
14	27.44	15.24	16.51
16	29.98	17.78	19.05
20	35.06	22.86	24.13
26	42.68	30.48	31.75
34	52.84	40.64	41.91
40	60.46	48.26	49.53
50	73.16	60.96	62.23

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

E-C2FE-xxK02P-LF
SERIES | KEYPLUG 2/PA1R
10~50WAY
FULL EAR
TWO TYPE

DESCRIPTION: 2.54mm Pitch Card Edge