


with whole circular hole Type

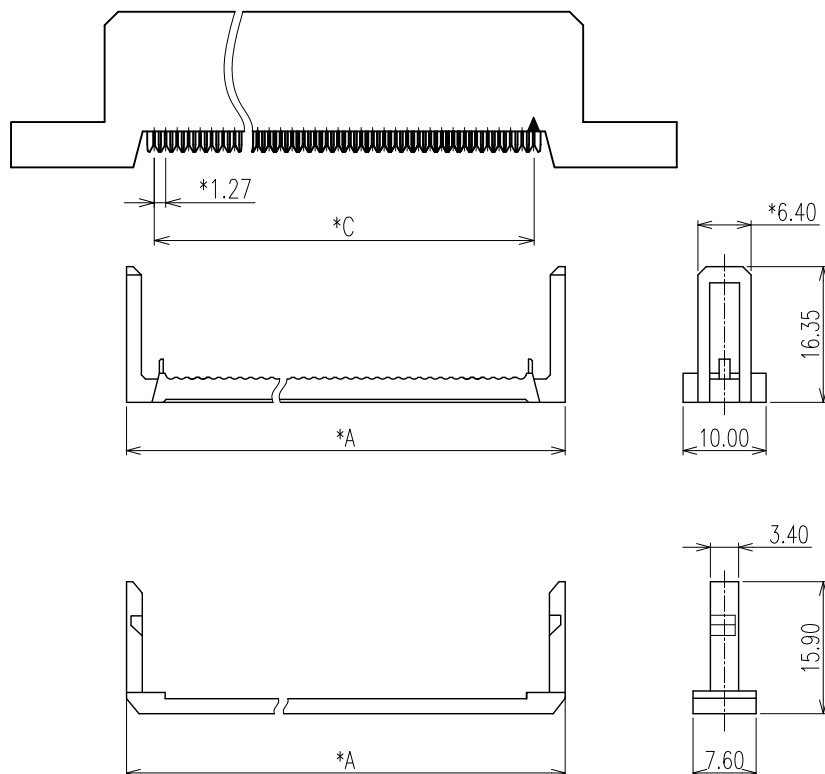

#### Specifications:

Current Rating:1.0 Amp

Contact resistance:20m Ohm Max. at 6V DC 0.3A

Insulator resistance:1000M ohm min. at 500V DC

Withstanding Voltage:500V AC/Minute

Operating Temperature Range:-55°~+105°C

Wire Size Flat Cable I.D.C: 1.27mm Pitch

AWG#28(standard) OR #30 (solid).

Material And Finish

Insulator:PBT&Glass-fiber reinforced UL94V-0

Insulator Color:Black

Contact:Phosphor Bronze or Brass

Contact Plating:See Contact Plating Tab.

Note:(\*)Marked is Important DIM For QC.

No. of Positions

| No. | A     | B     | C     |
|-----|-------|-------|-------|
| 10  | 22.36 | 10.16 | 11.43 |
| 14  | 27.44 | 15.24 | 16.51 |
| 16  | 29.98 | 17.78 | 19.05 |
| 20  | 35.06 | 22.86 | 24.13 |
| 26  | 42.68 | 30.48 | 31.75 |
| 34  | 52.84 | 40.64 | 41.91 |
| 40  | 60.46 | 48.26 | 49.53 |
| 50  | 73.16 | 60.96 | 62.23 |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.35  
.XX ± 0.25  
.XXX ± 0.10  
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

E-C3FE-xx-LF  
SERIES | LEADFREE  
10~50WAY  
FULL EAR  
THREE TYPE

DESCRIPTION: 2.54mm Pitch Card Edge