

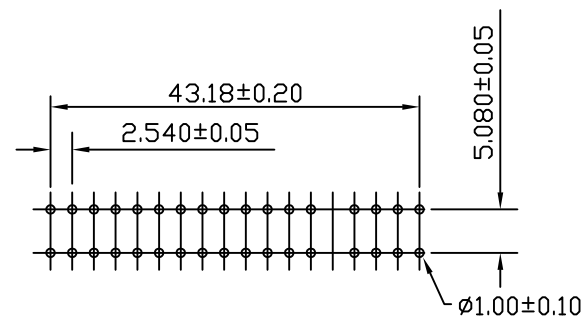
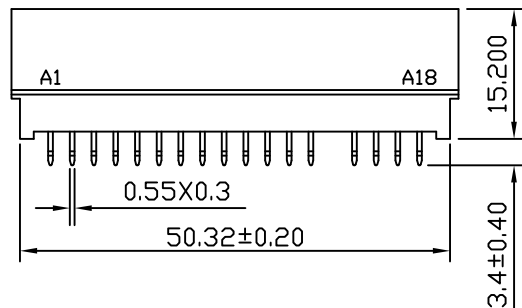


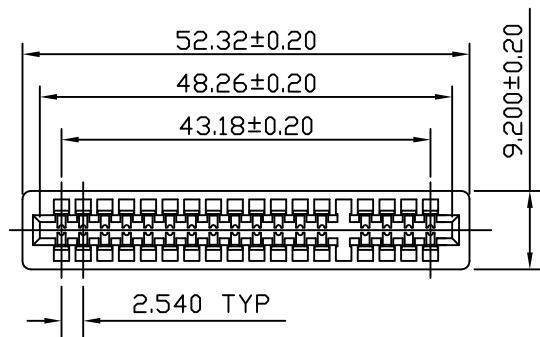

RECOMMENDED PCB LAYOUT

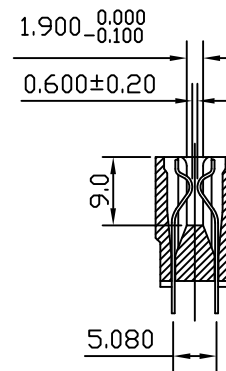

MATERIAL

INSULATOR: GLASS-REINFORCED THERMOPLASTIC (PBT),
UL94V-0 RATED.

CONTACT: COPPER ALLOY.

PLATING: CONTACT AREA- SELECT GOLD PLATED OVER NICKEL.

SOLDER AREA- TIN OVER NICKEL.

ELECTRICAL

DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC RMS.

CURRENT RATING: 3 AMP.

INSULATION RESISTANCE: 5,000 MEG. OHMS MIN. AT 500 VDC.

CONTACT RESISTANCE: 20 MILLI OHMS MAX.

MECHANICAL

INSERTION FORCE: 340 GRAMS MAX PER CONTACT PAIR.

WITHDRAWAL FORCE: 28 GRAMS MIN PER CONTACT PAIR.

ENVIRONMENTAL

TEMPERATURE RANGE: -55° TO +85°.

RoHS Compliant

TOLERANCES ARE

0-10 ±0.2

30-100 ±0.4

OVER 300 ±0.6

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

E-D-036E14P-LF
SERIES LEADFREE
EMPTY 14.32 PIN
36 WAY
DIP 180°

DESCRIPTION: CARDEDGE SLOT 36 P, 2.54mm PITCH

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com