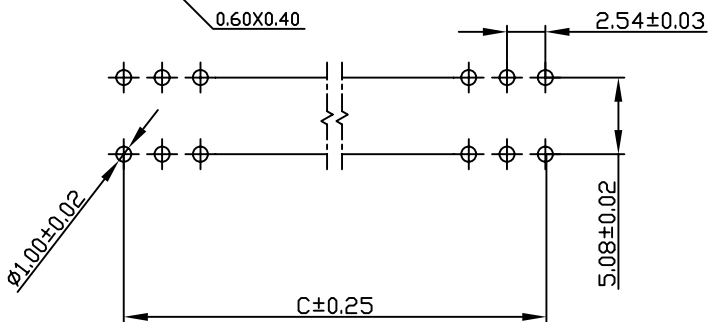
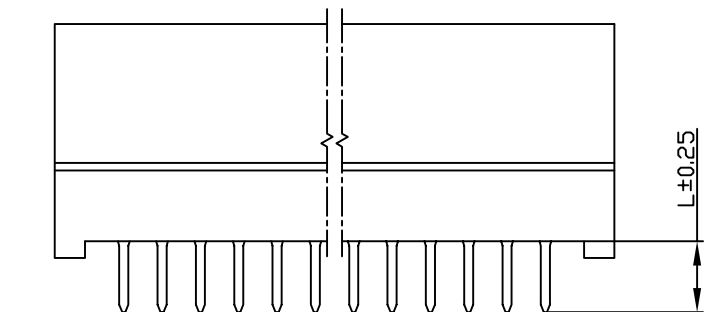
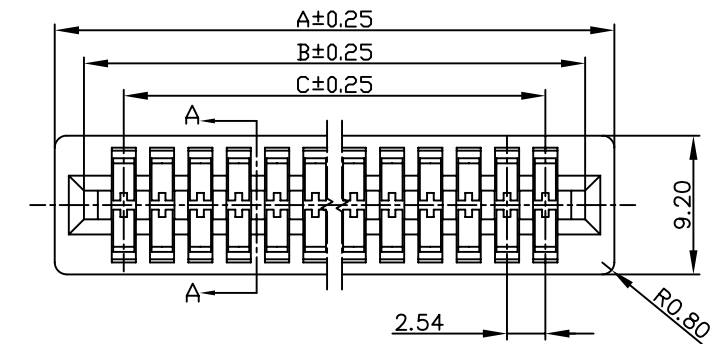


FEATURE:

INSULATOR

Glass-Filled PBT is 94V-0 rated

CONTACT

Alloy Copper selective gold plating
over nickel

SPECIFICATION:

Current Rating : 10 amperes

Contact Resistance : 20 miniohms max.

Operation Temperature : -55°C to +105°C

Voltage Rating : 800 VAC 1 minute

Insulation Resistance : 5000 megaohms min.

Insertion Force : 412 grams max. per pair

Withdrawal Force : 32 grams min. per pair

TAIL LENGTH	L
04	4.70mm
06	6.10mm
14	14.10mm
21	21.80mm

CONTACTS NO	DIM A	DIM B	DIM C
2/4	11.68	7.82	2.54
3/6	14.22	10.36	5.08
4/8	16.76	12.90	7.62
5/10	19.30	15.44	10.16
6/12	21.84	17.98	12.70
7/14	24.38	20.52	15.24
8/16	26.92	23.06	17.78
9/18	29.46	25.60	20.32
10/20	32.00	28.14	22.86
11/22	34.54	30.68	25.40
12/24	37.08	33.22	27.94
13/26	39.62	35.76	30.48

CONTACTS NO	DIM A	DIM B	DIM C
14/28	42.16	38.30	33.02
15/30	44.70	40.84	35.56
16/32	47.24	43.38	38.10
17/34	49.78	45.92	40.64
18/36	52.32	48.46	43.18
19/38	54.86	51.00	45.72
20/40	57.40	53.54	48.26
22/44	62.48	58.62	53.34
24/48	67.56	63.70	58.42
25/50	70.10	66.24	60.96
30/60	82.80	78.94	73.66
31/62	85.34	81.48	76.20

CONTACTS NO	DIM A	DIM B	DIM C
32/64	87.88	84.02	78.74
35/70	95.50	91.64	86.36
36/72	98.60	94.18	88.90
40/80	108.20	104.34	99.06
43/86	115.82	111.96	106.68
49/98	138.68	134.82	129.54
50/100	133.60	129.74	124.46
54/108	143.76	139.90	134.62
60/120	159.00	155.14	149.86

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

E-DDxA10-xxx-LF

SERIES
LEADFREE
004~120 WAY
10 amperes
D04:DIP 4.70mm
D06:DIP 6.10mm
D14:DIP 14.10mm
D21:DIP 21.80mm
DIP 180°

DESCRIPTION: EDGE CONNECTOR 2.54mm PITCH WITHOUT MOUNTING EARS