


SEC A-A

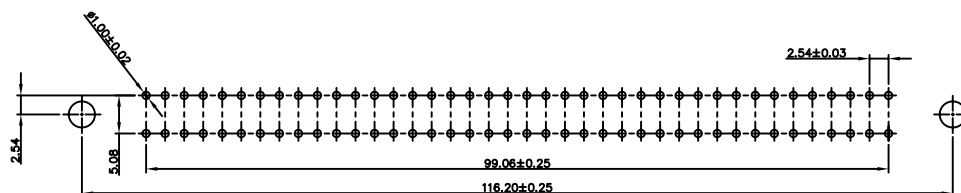

Pcb layout recommend

FEATURE:

INSULATOR

Glass-Filled P.B.T. is 94V-0 rated

CONTACT

Phosphor Bronze selective gold plating
over nickel

SPECIFICATION:

Current Rating : 3 amperes

Contact Resistance : 20 miniohms max.

Operation Temperature : -55°c to +105°c

Voltage Rating : 800 VAC 1 minute

Insulation Resistance : 5000 megaohms min.

Insertion Force : 412 grams max. per pair

Withdrawal Force : 32 grams min. per pair

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

E-DME-080-LF
SERIES | LEADFREE
80 WAY
MIDDLE EARS
DIP 180°

DESCRIPTION: EDGE CONNECTOR 2.54mm PITCH WITH MID-HIGH MOUNTING EARS