


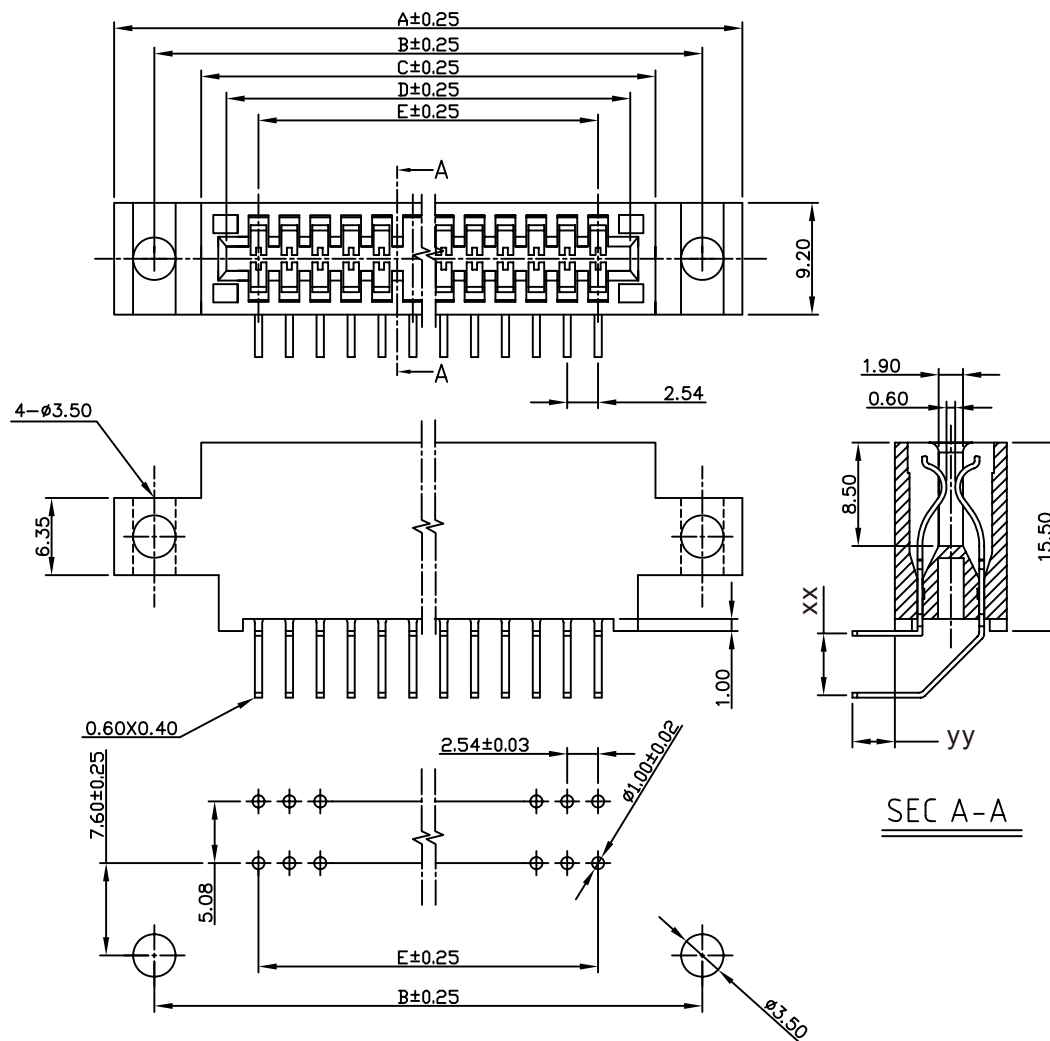

FEATURE:

INSULATOR

Glass-Filled PBT is 94V-0 rated

CONTACT

Phosphor Bronze selective gold plating
over nickel

SPECIFICATION:

Current Rating : 3 amperes

Contact Resistance : 20 miniohms max.

Operation Temperature : -55°C to +105°C

Voltage Rating : 800 VAC 1 minute

Insulation Resistance : 5000 megaohms min.

Insertion Force : 412 grams max. per pair

Withdrawal Force : 32 grams min. per pair

TAIL LENGTH	YY	ROW TO ROW	XX
	3.50mm		5.08mm
06	6.00mm	38	3.81mm
10	10.80mm	30	3.00mm
		26	2.54mm

CONTACT NO	DIM A	DIM B	DIM C	DIM D	DIM E
12/24	51.69	45.09	37.38	33.22	27.94
22/44	77.09	70.49	62.78	58.62	53.34
24/48	82.17	75.57	67.86	63.70	58.42
25/50	84.71	78.11	70.40	66.24	60.96
28/56	92.33	85.73	78.02	73.86	68.58
30/60	97.41	90.81	83.10	78.94	73.66
35/70	110.11	103.51	95.80	91.64	86.36
36/72	112.65	106.05	98.34	94.18	88.90
43/86	130.43	123.83	116.12	111.96	106.68
44/88	133.17	126.57	118.66	114.50	109.22
50/100	148.21	141.61	133.90	129.74	124.46

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

E-RMExxyy-xxx-LF
SERIES
DIP 90°
MIDDLE EARS
BLANK: 5.08mm
38: 3.81mm
26: 2.54mm
LEADFREE
024~100WAY
BLANK: 3.50mm
06: 6.00mm
10: 10.8mm

DESCRIPTION: