
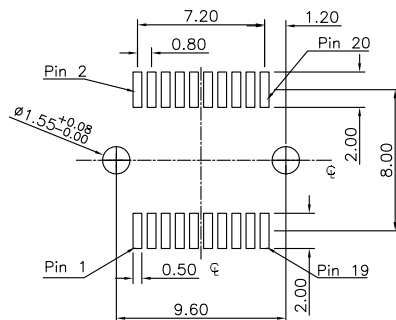







P.C. Board Layout
(Tolerance ± 0.05)

Material:

Housing: High Temperature Plastic, UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1.8A @ 30°C Temperature Rise.


Dielectric Withstanding Voltage: AC 600V For 1 minute.

Insulator Resistance: 100000M Ω min. at DC 500V.

Contact Resistance: 15.8m Ω max. at DC 100mA.

Operating Temperature: -55°C~+125°C.

***RoHS Compliant**

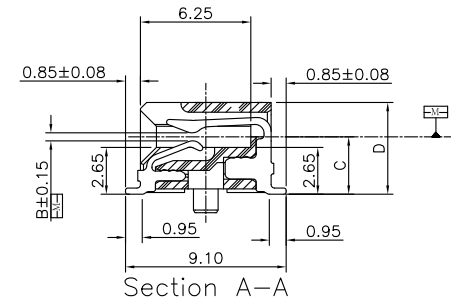

Card Thickness	A	B	C	D
1.57	1.80	0.95	3.54	5.78

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

E08-WP-020-LF
SERIES POST 90°SMT
LEADFREE
020 WAY

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com