
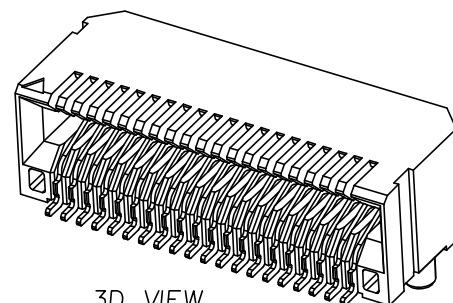


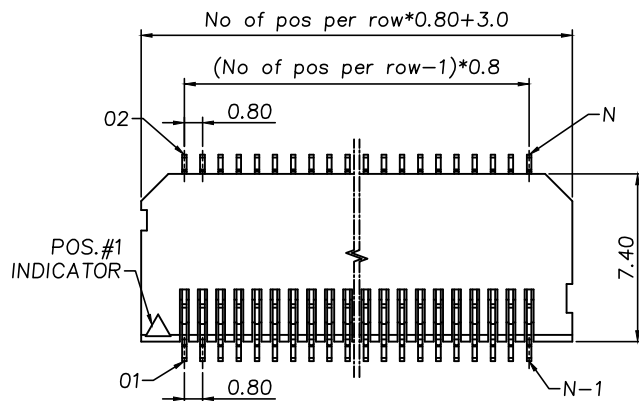



3D VIEW

FEATURE




Insulator Material : LCP UL94V-0
Contact Material : Phosphor Bronze
Plating : Selective Gold Plating Over Contact Area
100μ" min. Matte Tin Plating On Solder Area
50μ" min. Nickel Underplating Overall

SPECIFICATION

Current Rating : 2 Ampere Per Pin
Voltage Rating : 250 VAC
Operation Temperature Range : -55°C to +125°C

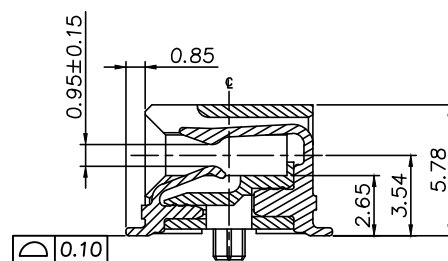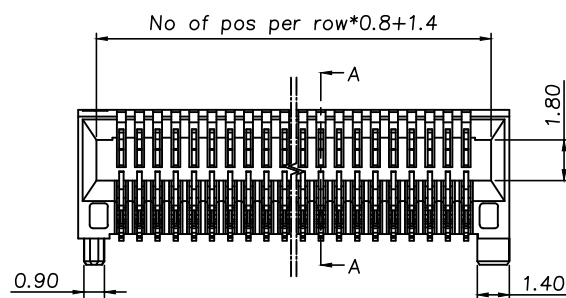

SEC A-A

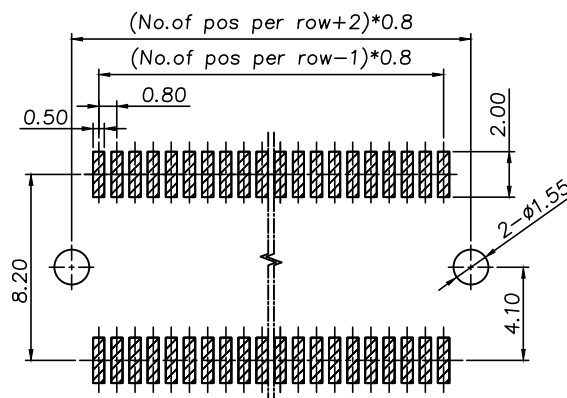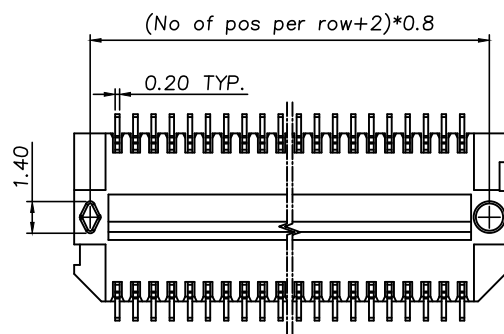

RECOMMENDED P.C.B LAYOUT
TOP VIEW(TOLERANCE:±0.05)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.38

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

E08-WP-xxx-LF
SERIES LEADFREE
020.040 WAY
POST
90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: Pitch 0.80 mm Edge Card Connector SMT Type