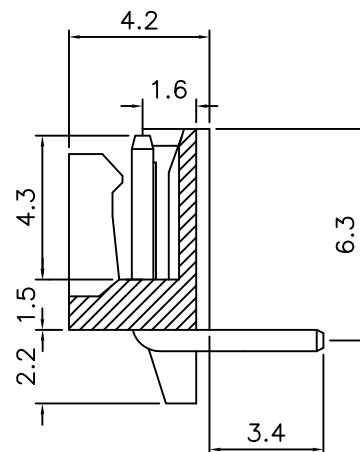
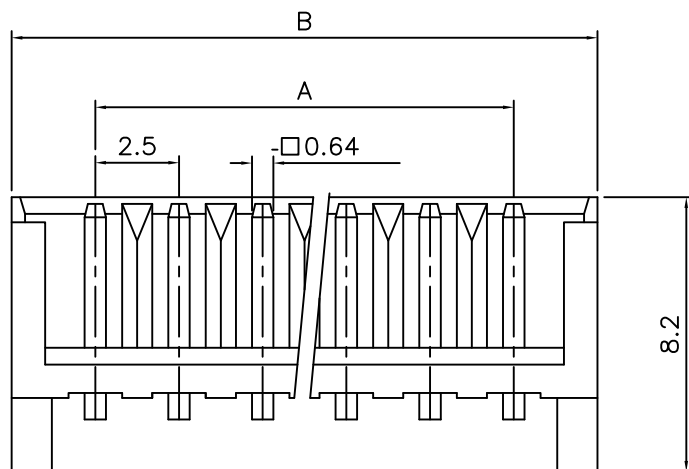


Poles	Ordering code	Dimension in.(mm)	
		A	B
2	EH-RLCP-02	0.098(2.5)	0.295(7.5)
3	EH-RLCP-03	0.197(5.0)	0.394(10.0)
4	EH-RLCP-04	0.295(7.5)	0.492(12.5)
5	EH-RLCP-05	0.394(10.0)	0.591(15.0)
6	EH-RLCP-06	0.492(12.5)	0.689(17.5)
7	EH-RLCP-07	0.591(15.0)	0.787(20.0)
8	EH-RLCP-08	0.689(17.5)	0.886(22.5)
9	EH-RLCP-09	0.787(20.0)	0.984(25.0)
10	EH-RLCP-10	0.886(22.5)	1.083(27.5)
11	EH-RLCP-11	0.984(25.0)	1.181(30.0)
12	EH-RLCP-12	1.083(27.5)	1.280(32.5)
13	EH-RLCP-13	1.181(30.0)	1.378(35.0)
14	EH-RLCP-14	1.280(32.5)	1.476(37.5)
15	EH-RLCP-15	1.378(35.0)	1.575(40.0)

WAFER

Poles: 2-15

Material: Past: Brass, Tin/Plated

Base: LCP Natural

Q'ty: 500, 1000 pcs/bag

SPECIFICATIONS

Voltage rating: AC 250V DC

Current rating: AC,DC,3A

Withstand voltage: AC 800 V/min.

Insulation resistance: 1000 MΩ min.

Temperature range: -25°C~+85°C

Applicable PC board thickness: 0.8~1.6mm

Contact resistance: Initial value/10 mΩ max.

After environmental

Testing/20 mΩ max.

Solder-Ability:

Soldering time: 2.5 ±0.5 Sec. Solder temperature: 245 ±5° C

Solder Wetting: 95% of immersed area must show no voids, pin holes.

Resistance to Soldering Heat:

Solder time: 10±0.5 Sec. Temperature: 260°C±5°C 0.5mm from Terminal

tip and fitting nail tip Appearance :no damage

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG ±

照片框

ORDER INFORMATION

EH-RLCP-xx-LF
SERIES LCP LEADFREE
DIP 90° 02-15WAY

DESCRIPTION: