

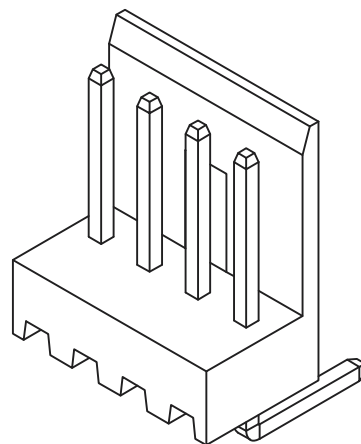
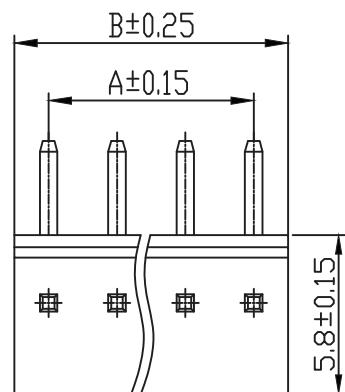



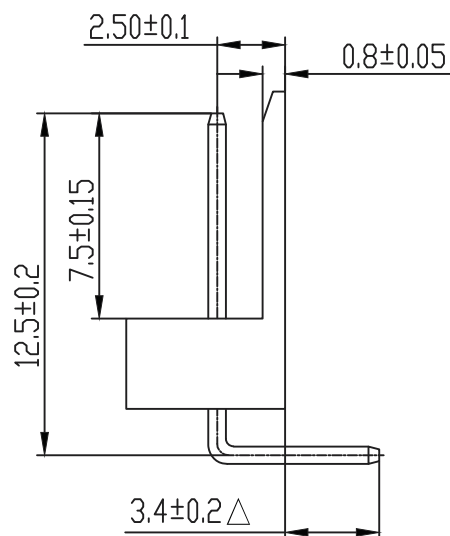

SPECIFICATIONS

Current rating	:3A AC, DC
Voltage rating	:250V AC, DC
Temperature range	: -25°C ~ +85°C
Contact resistance	:10m Max
Insulation resistance	:1000M Min
Withstanding voltage	:1000 V AC/minute
Finished	:Tin-plated/
Housing Material	:Nylon-66, UL94 V-0

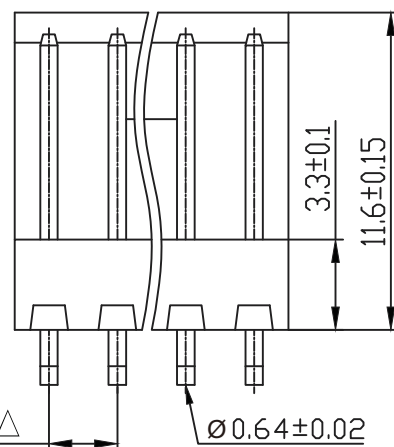

Circuits	Dimension mm	
	A	B
2PIN	2.50	5.00
4PIN	7.50	10.00
6PIN	12.50	15.00
8PIN	17.50	20.00
10PIN	22.50	25.00
12PIN	27.50	30.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

EI-R-xx-LF
SERIES | LEADFREE
02~12 WAY
DIP 90°

DESCRIPTION: