


T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-top view)



| | | | | |
|-----|----------------|-----|------------|----------------|
| 4 | HOUSING | 1 | PA9T | UL-94V0(BLACK) |
| 3 | RING SPRING 3# | 1 | BeCu t=0.2 | Au PLATED |
| 2 | TIP SPRING 2# | 1 | BeCu t=0.2 | Au PLATED |
| 1 | RING SPRING 1# | 1 | BeCu t=0.2 | Au PLATED |
| LTR | PART NAME | QTY | MATERIAL | REMARK |

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, \pm
X, \pm
.XX \pm
.XXX \pm
ANG \pm




PPOJECTION

照片框

ORDER INFORMATION

EJ-W15R-03-LF
SERIES | REEL | LEADFREE
03 WAY
POST 1.0+5.4mm
90°SMT


DESCRIPTION: MINIATURE JACK

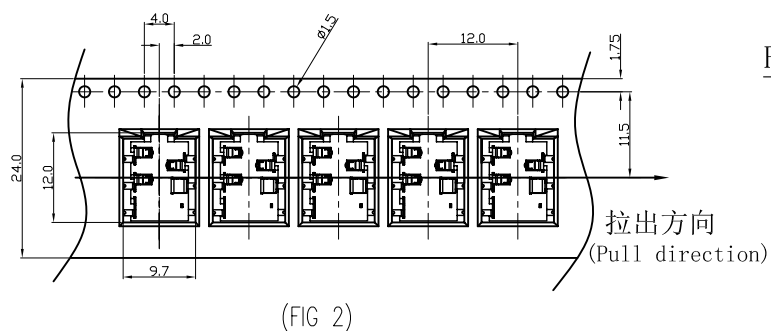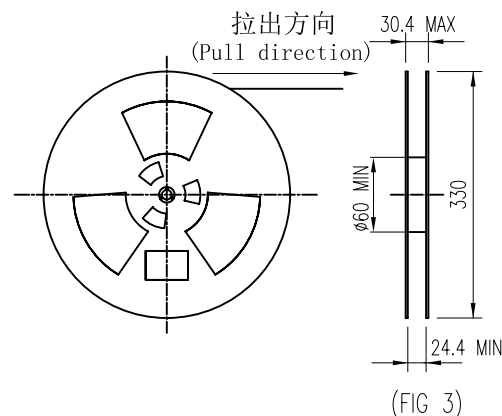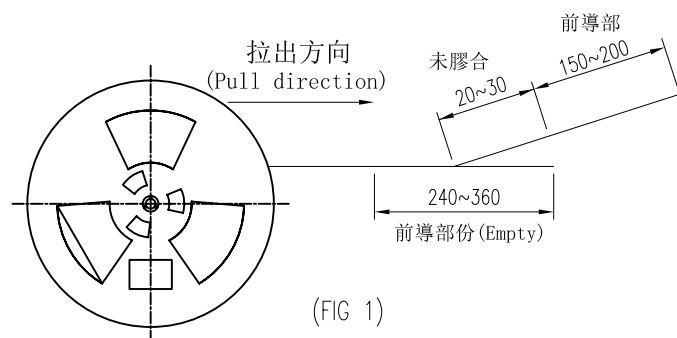

Reel外觀尺寸圖



1 REEL
= 1500 PCS

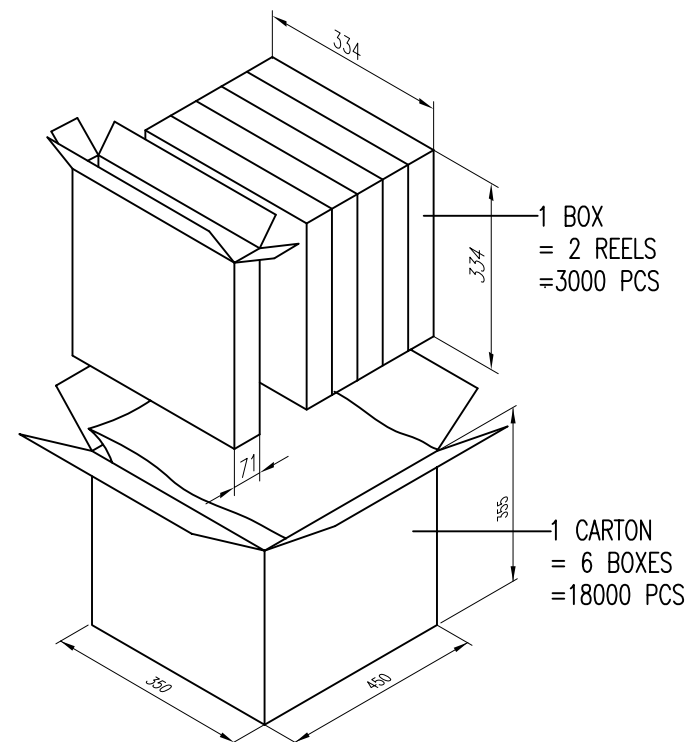

REMARK:

- 1.The connector can not be loaded on the position of length 240~360mm in the reel tape and lead tape.The cover tape with 20~30mm length shall not be adhesive on the lead tape and the cover tape is lead portion shall have 150~200mm length (Refer FIG 1).
- 2.Tape shall turn on right direction.
- 3.The direction of connector is fixed regarding the position of terminal,please refer outline drawing (Refer FIG 2).
- 4.After winding,using the adhesive tape(30~50mm) to stick the leader of cover tape on the side of reel.
- 5.One reel can be loaded 1500 pcs connector.
- 6.The label shall be pasted on the front side of reel (Refer FIG 3).
- 7.Condition of 300mm per minute ,the extraction strength of cover tape shall reach 20~150 gf.
- 8.If the quantity is less then 6 reel in one carton,the packing shall be able to resist to shark.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

EJ-W15R-03-LF
SERIES REEL POST 1.0+5.4mm
90°SMT
LEADFREE
03 WAY

DESCRIPTION: