

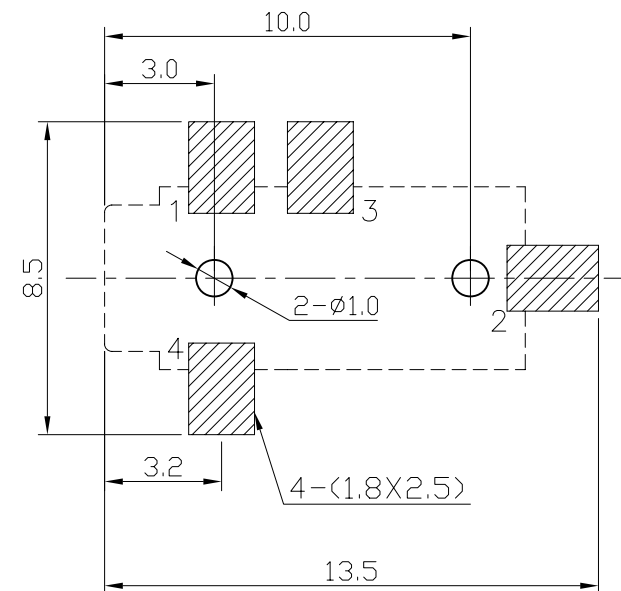
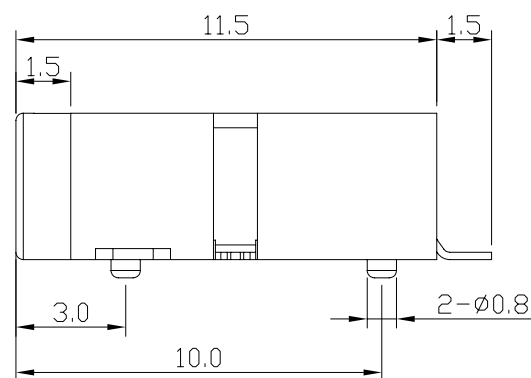
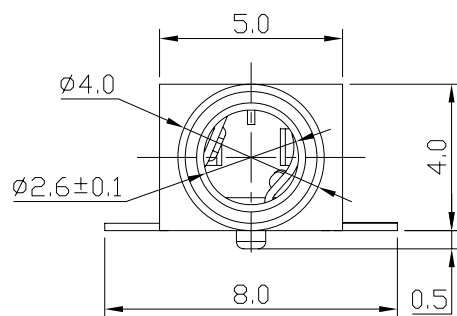
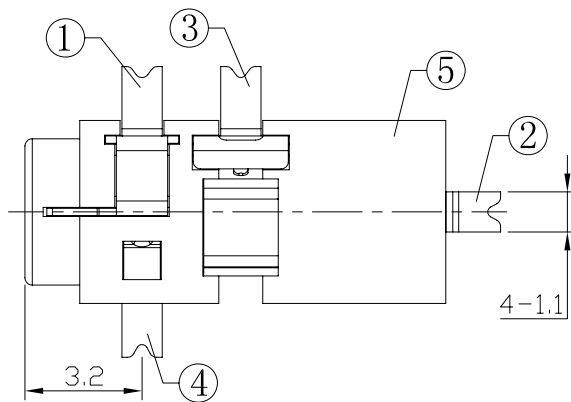


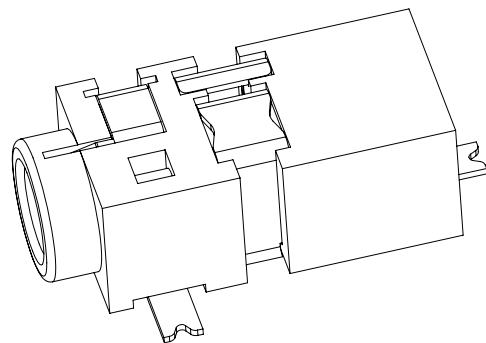

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)



5	HOUSING	1	PA9T	UL-94V0(BLACK)
4	SPRING PIECE	1	C5191 t=0.20	Ag PLATED
3	SPRING PIECE	1	C5191 t=0.20	Ag PLATED
2	CONTACT FOOT	1	C5191 t=0.20	Ag PLATED
1	CONTACT FOOT	1	C5191 t=0.20	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$


PPOJECTION

照片框

ORDER INFORMATION



EJ-W17R-04-LF
SERIES | LEADFREE
04 WAY
REEL
POST 1.5+7.0mm
90°SMT

DESCRIPTION: MINIATURE JACK

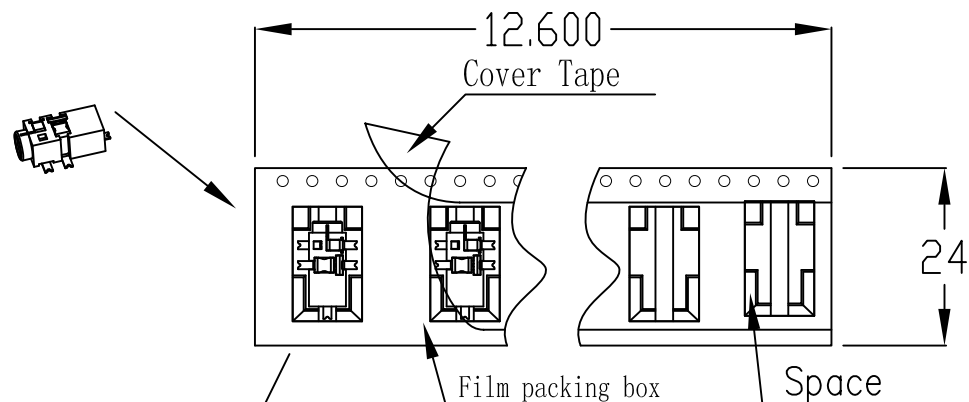

1000pcs X 1 = 1000pcs


Embossed Carrier Reel

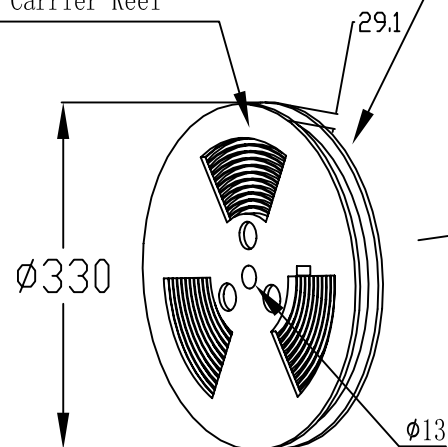

1000pcs X 13 = 13000pcs

Net weight:4.5Kg

Total weight:10Kg

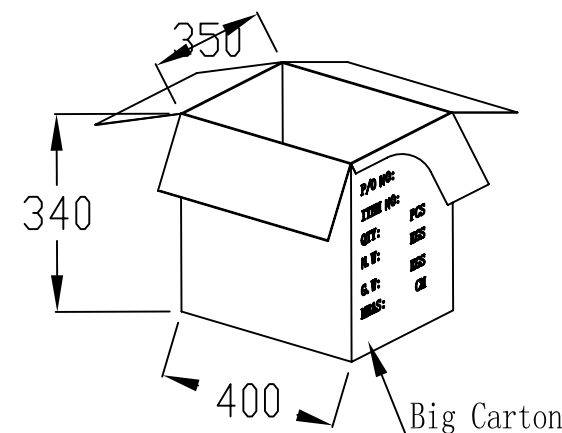

13000pcs X 1 = 13000pcs

Unit:mm

Packing temperature request:

160°C~180°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

EJ-W17R-04-LF
SERIES REEL LEADFREE
04 WAY
POST 1.5+7.0mm
90°SMT

DESCRIPTION: