

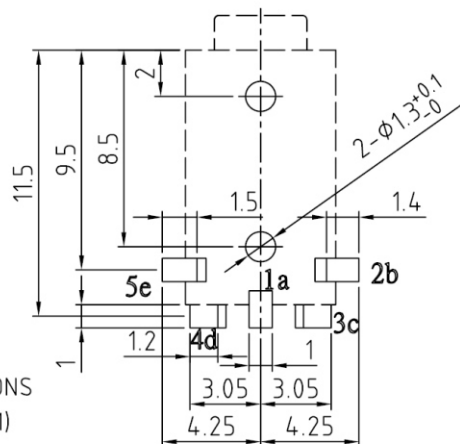


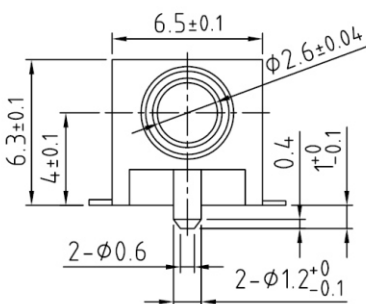
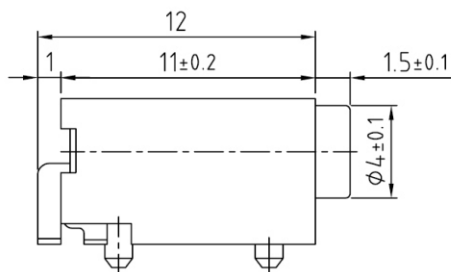
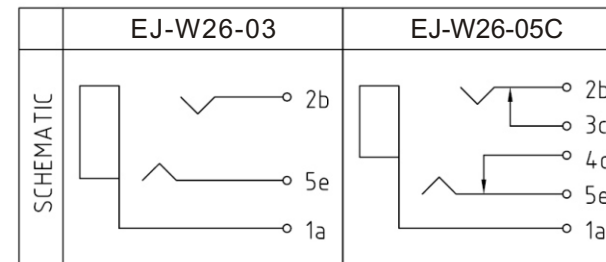
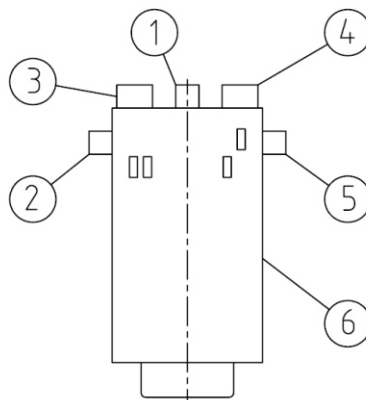


6	BODY	1	NYLON PA-9T	BLACK	(RoHS Fit)
5	NO.5 PIN (RING)	1	Y-CUT	Ag	t=0.2
4	NO.4 PIN (BREAK R)	1	C2680R-H	Ag	t=0.25
3	NO.3 PIN (BREAK T)	1	C2680R-H	Ag	t=0.25
2	NO.2 PIN (TIP)	1	Y-CUT	Ag	t=0.25
1	NO.1 PIN (EARTH)	1	C5210R-H	Ag	t=0.25
NO.	PART NAME	Q'TY	MATERIAL	DISPOSAL	REMARK



PCB LAYOUT
MOUNTING DIMENSIONS
(TOLERANCE ±0.1)

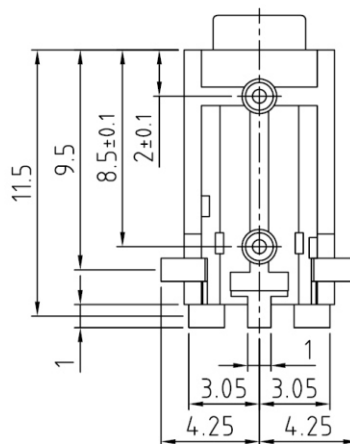

A Scale:3:1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

EJ-W26-xxx-LF
SERIES
LEADFREE
03:3P
05C:5P3C
POST 2.0+6.5mm
90°SMT

DESCRIPTION: