

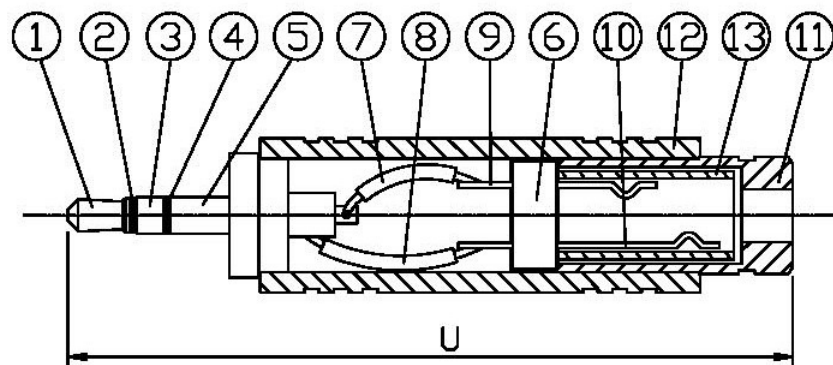
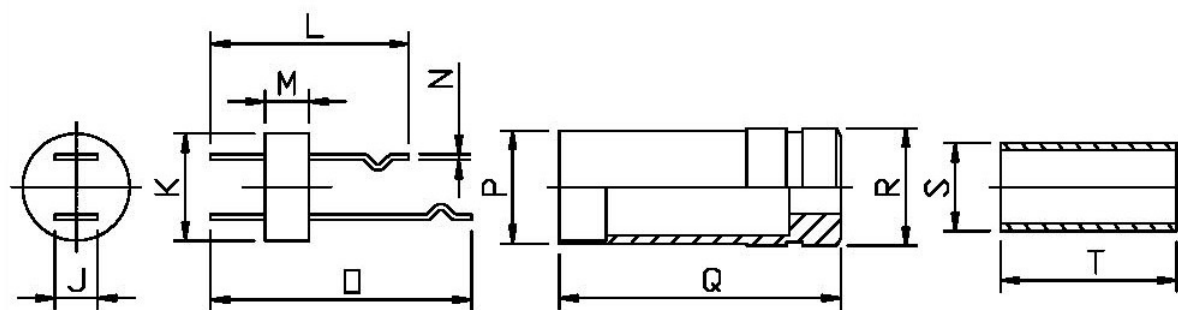


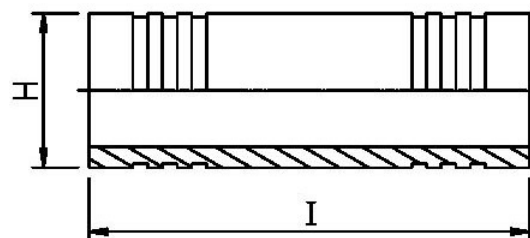

A $\varnothing 2.2 \pm 0.1$	H $\varnothing 10.5 \pm 0.1$	□ 17.8 ± 0.1
B $\varnothing 2.3 \pm 0.05$	I 30 ± 0.1	P $\varnothing 7.7 \pm 0.1$
C $\varnothing 2.5 \pm 0.05$	J 2.9	Q 19.2 ± 0.1
D $\varnothing 8.5 \pm 0.1$	K $\varnothing 7.3 \pm 0.1$	R $\varnothing 8 \pm 0.1$
E $11^{+0.3}_{-0.1}$	L 13.5 ± 0.1	S $\varnothing 6$
F 4 ± 0.1	M 3 ± 0.1	T 12 ± 0.3
G 19.7 ± 0.1	N 0.4	U 49.4 ± 0.3

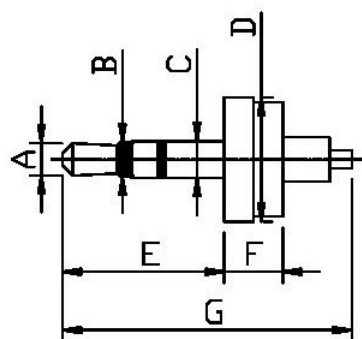

13	INSULATING COVER	PVC		
12	MIDDLE COPPER SHELL	COPPER	PLATED	毛面
11	COPPER SHELL	COPPER	PLATED	
10	MIDDLE SOLDER SLICE	BRONZE		
9	SMALL SOLDER SLICE	BRONZE		
8	ELECTRIC WIRE			BLACK
7	ELECTRIC WIRE			BLACK
6	WHITE GRANULE (BIG)	P.O.M		WHITE
5	COPPER TUBE & HEAD	COPPER	PLATED	
4	BLACK GRANULE (MIDDLE)	P.O.M		BLACK
3	MIDDLE COPPER HEAD	COPPER	PLATED	
2	BLACK GRANULE	P.O.M		BLACK
1	PEARL HEAD	COPPER	PLATED	
NO	DESCRIPTION	MATERIAL	DISPOSE	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

ENPN-ASFM-0303-LF

SERIES

LEADFREE

03 TO 03 WAY

FULL METAL
FEMALE TO MALE

DESCRIPTION: