


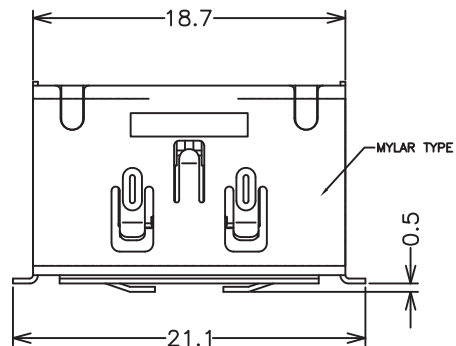




NOTES:

1.MATERIAL:


HOUSING: THERMOPLASTIC HIGH TEMP WITH 30%G/F UL94 V-0
 COLOR: BLACK
 ESATA CONTACT: BRASS
 SHELL: PHOSPHOR BRONZE

2.FINISH:

CONTACT: GOLD PLATING ON CONTACT AREA
 100μ" MIN.TIN PLATING ON SOLDER TAILS
 50μ" MIN.NICKEL UNDERPLATING OVER ALL
 SHELL: 50μ" MIN.NICKEL UNDERPLATING OVER ALL

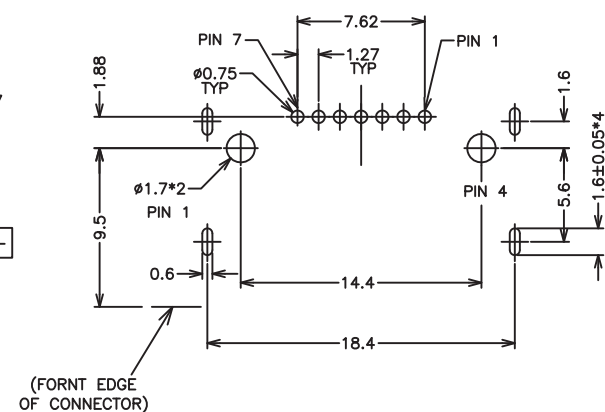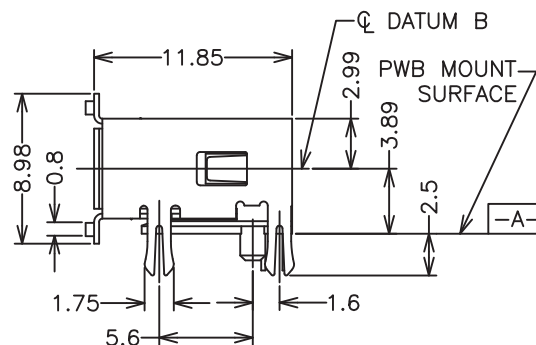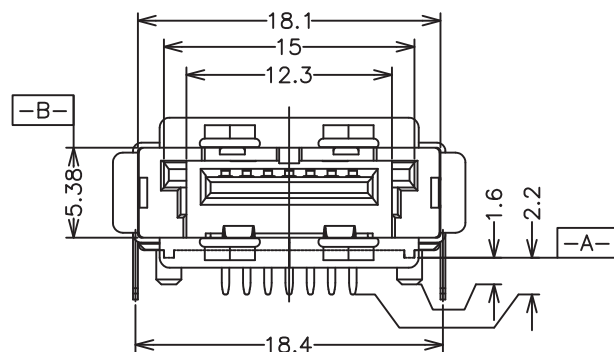

RECOMMEND P.C.BOARD LAYOUT
 PCB TOLERANCE:±0.05

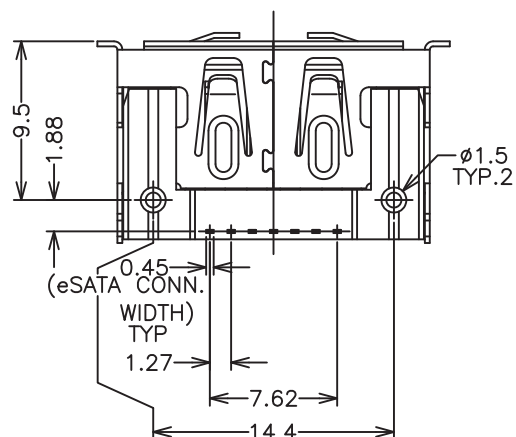

PIN DEFINITION

ESATA	
NAME	TYPE
P1	GND
P2	A+
P3	A-
P4	GND
P5	B-
P6	B+
P7	GND

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4


PPOJECTION

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 ANG ± 3°

照片框

ORDER INFORMATION

ESATA-PRZZP-07-LF

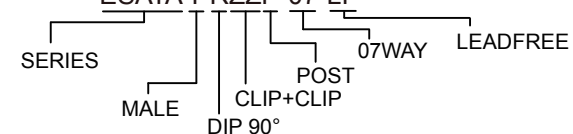

DESCRIPTION: ESATA 7P, R/A, STD, DIP TYPE