


ELECTRICAL PROPERTIES:

100% OPEN SHORT MIS-WIRE TEST
 CONTACT RESISTANCE: 10ohm
 INSULATION RESISTANCE: 5Mga ohm
 HIPOT TEST: DC 300V/10MS

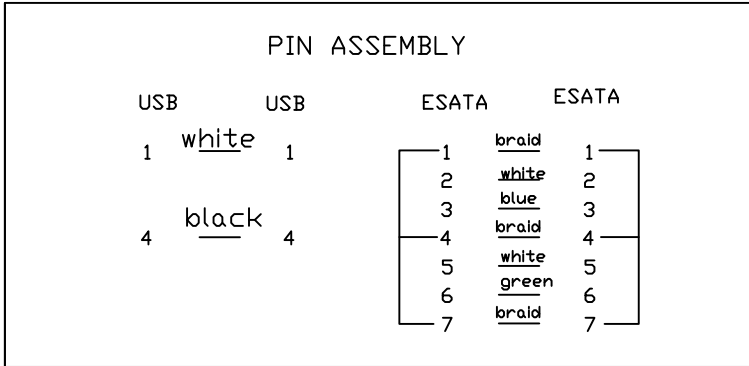

NO.	DESCRIPTION	UNCT	Q'TY
3	PVC 55P MOLD COLOR: BLACK	PCS	1
2	ESATA+USB CONN SHELL PLATED NICKEL	PCS	2
1	UL 30AWG/2PR+24AWG/2C+AB OD:5.8MM JACKET BLACK IN COLOR	PCS	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION

照片框

ORDER INFORMATION

ESATAPX2-074A2430-F50C-LF

SERIES

LEADFREE
 500mm
 FEMALE TO FEMALE
 24.30 AWG
 7+4 PIN A TYPE TO 7+4 PIN A TYPE

DESCRIPTION: DUALPOWER SATA F/F L:1M BLACK