


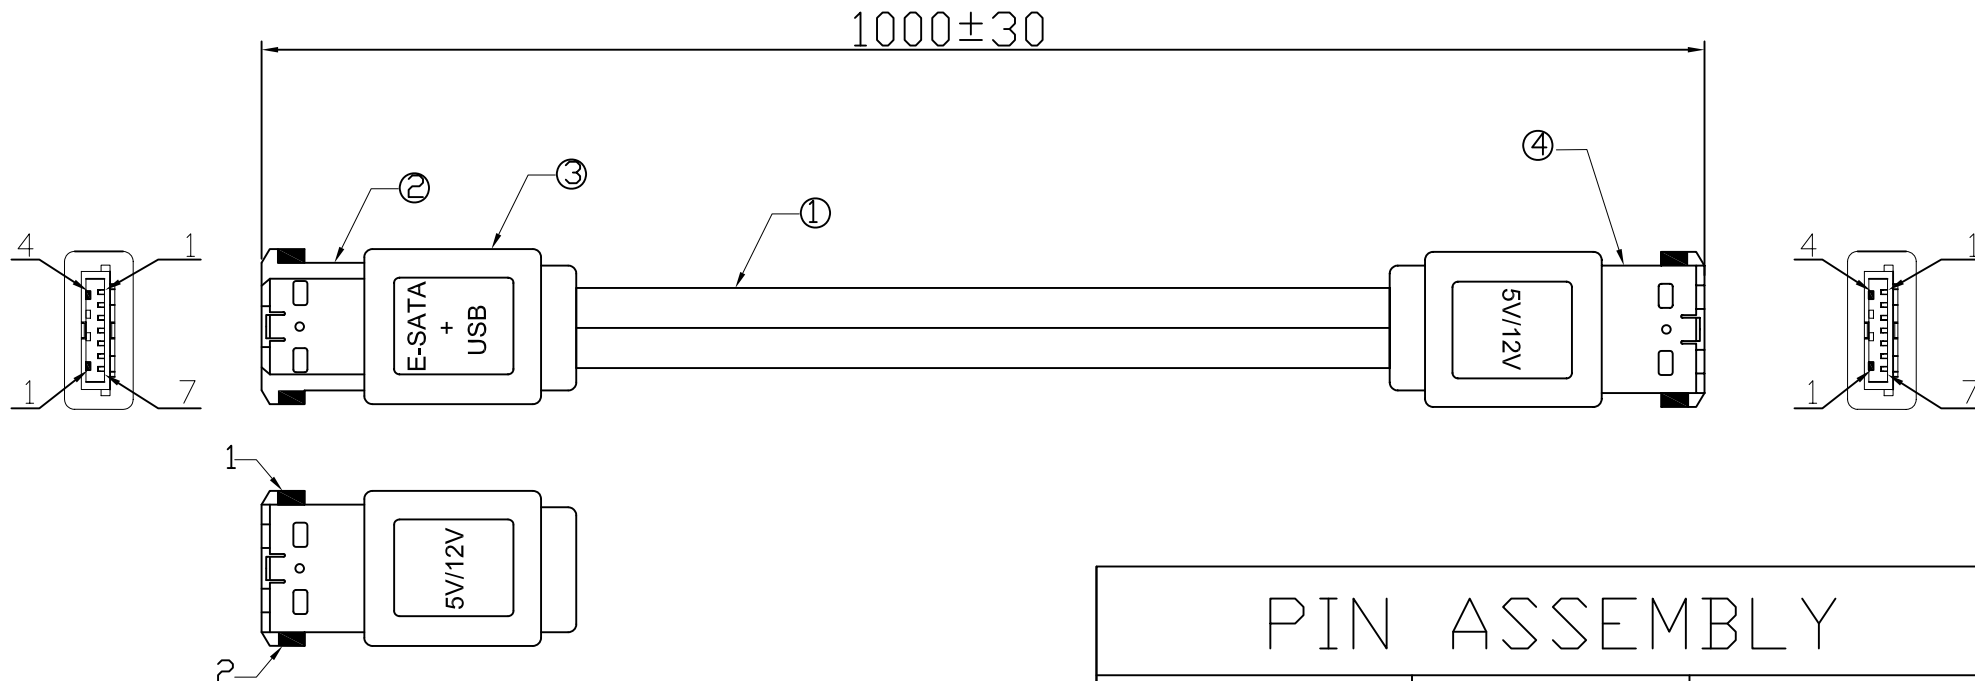

ELECTRICAL PROPERTIES:

100% OPEN SHORT MIS-WIRE TEST

CONTACT RESISTANCE: 10ohm

INSULATION RESISTANCE: 5Mga ohm

HIPOT TEST: DC 300V/10MS

PIN ASSEMBLY

ESATA+USB

ESATA+USB

ESATA+USB

ESATA+USB

ESATA+USB

ESATA+USB

1
2
3
4
5
6
7

1
2
3
4
5
6
7

1 5V(+)
2
3
4 5V(-)

1
2
3
4

1 12V(+)
2 12V(-)
2

1
2

4	DUAL POWER ESATA+USB CONN SHELL PLATED NICKEL CONTACT:G/F	PCS	1
3	PVC 55P MOLD COLOR: BLACK	PCS	1
2	DUAL POWER ESATA+USB CONN SHELL PLATED NICKEL CONTACT:G/F	PCS	1
1	UL20276((26#/2(1P+2E+AL)+MB)*1F+(28#/1+28#/2C+20#/2C+AEB)*1F	PCS	1
NO.	DESCRIPTION	UNCT	Q'TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

ESATAPX2-074A2628-F1M-LF

SERIES

LEADFREE

1000mm

FEMALE TO FEMALE

26.28 AWG

7+4 PIN A TYPE TO 7+4 PIN A TYPE

DESCRIPTION: DUALPOWER SATA F/F L:1M BLACK