


NOTES :

1. ENVIRONMENTAL : TEMPERATURE RANGE -20°C TO +85°C .
2. ELECTRICAL :
 RATED : 1.5A @ 40V AC (rms)
 CONTACT RESISTANCE : 20 MILLIOHMS MAXIMUM
 INSULATION RESISTANCE : 1000 MEGOHMS MINIMUM
 DIELECTRIC WITHSTANDING VOLTAGE : 500V AC (rms)
3. MECHANICAL :
 MATING FORCE : 10 LB. (4.5Kg) MAXIMUM
 UNMATING FORCE : 2.2 LB. (1Kg) MINIMUM , 8.8LB. (4Kg) MAXIMUM
4. MATERIAL :
 HOUSING : GLASS FILLED THERMOPLASTIC , BLACK, UL 94V-0
 CONTACT : PHOSPHOR BRONZE
 SHELL : ZINC ALLOY, NICKEL PLATED
 BOARD LOCK : ZINC ALLOY OR COPPER PURE TIN PLATE
5. MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT.(RoHS)

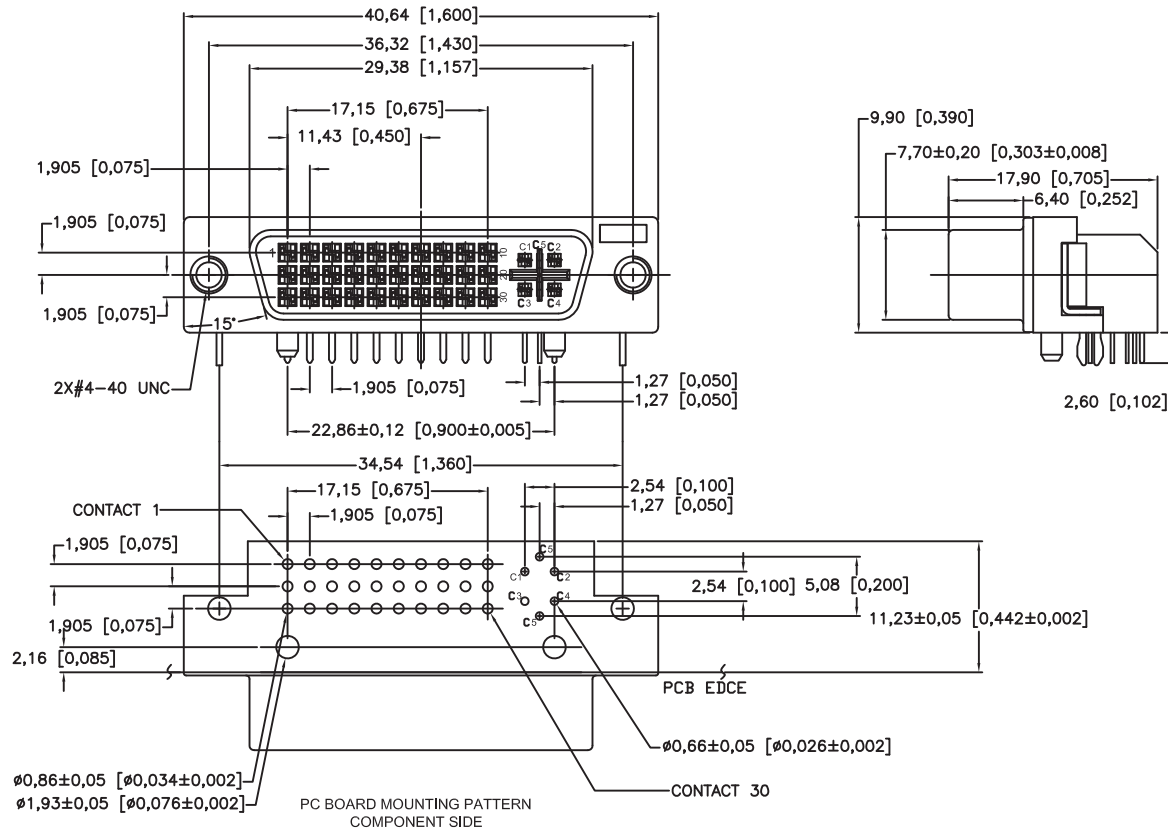

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

X, ±
 .X ± 0.25
 .XX ± 0.13
 .XXX ±
 ANG ± 2°

照片框

ORDER INFORMATION

EVC-SRN-30+5-LF
 SERIES | LEADFREE
 | 30+5 WAY
 | NUT
 | DIP 90°
 | FEMALE

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: FEMALE P&D CONNECTOR RIGHT ANGLE ANALOG (EVC)