
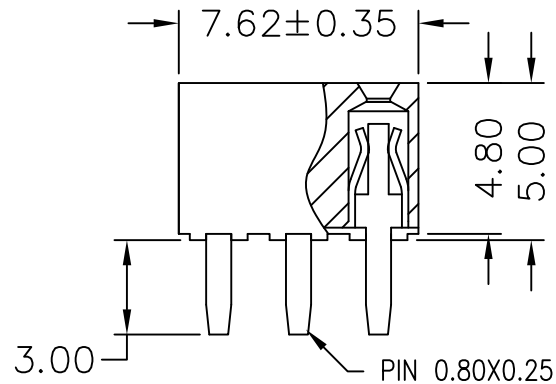



Recommended P.C.B Layout

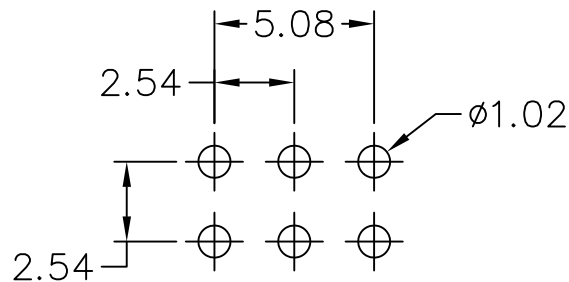

BOTTOM ENTRY

Recommended P.C.B Layout

## MATERIAL

Contact Pin : Phosphor Bronze

## SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

## RoHS Compliant

### TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ± 3°

PPOJECTION



## ORDER INFORMATION

F-B50-1X03A-LF  
SERIES | LEADFREE  
SINGLE SIDE  
03WAY  
BOTTOM ENTRY

DESCRIPTION: 2.54 FEMALE HEADER SINLGE ROW DIP TYPE BASE 5.00H