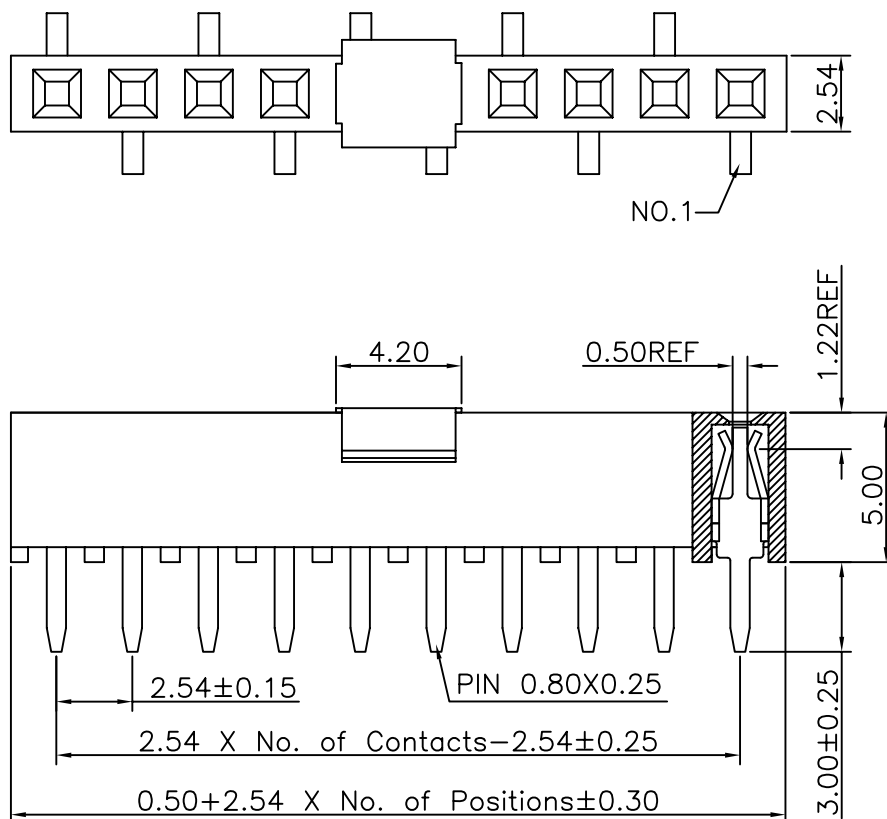


Specifications

Current Rating:3Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:600VAC

Contact Resistance:20mΩMax.


Operating Temperature:-40°C to +105°C

Materials

Contact Material:Phosphor Bronze

Insulator Material:Thermoplastic, UL 94V-0
PBT or the equivalent material

Recommended P.C.Board
Hole Layout
(Tolerance:±0.05)
Bottom Entry

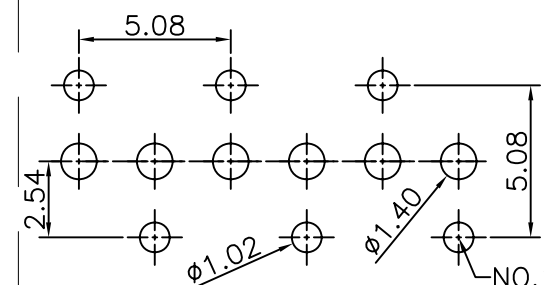

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-B50C-1XxxR-LF
SERIES
LEADFREE
R TYPE FOOT
1X02:02WAY
1X40:40WAY
CAP
BOTTOM ENTRY 5.0mm

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW DIP TYPE CONNECTOR