
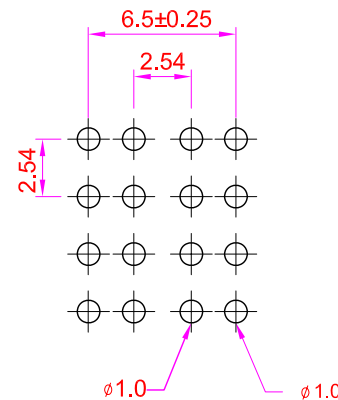
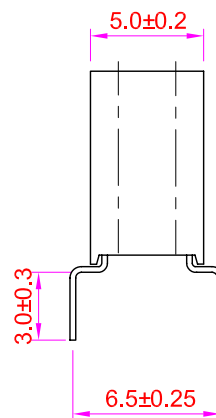


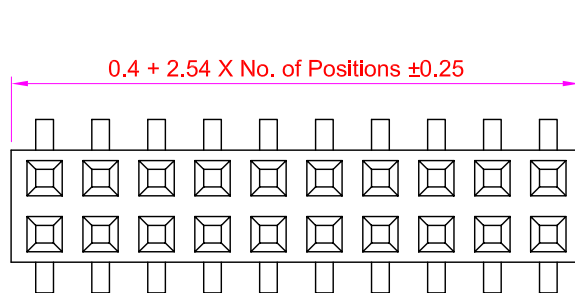

#### Specifications

Current Rating : 3 Amps

Insulator Resistance : 1000 Megohms min.

Contact Resistance : 20 m ohms max.

Dielectric Withstanding : AC 600V

Operating Temperature : -40° C ~ +105° C


Contact Material : Phosphor Bronze

Insulator Material : Polyester, UL 94V-0 Nylon-6T

Contact Plated : See Option

Standard: Full Gold Flash

#### Recommended P.C. Board Hole Layout

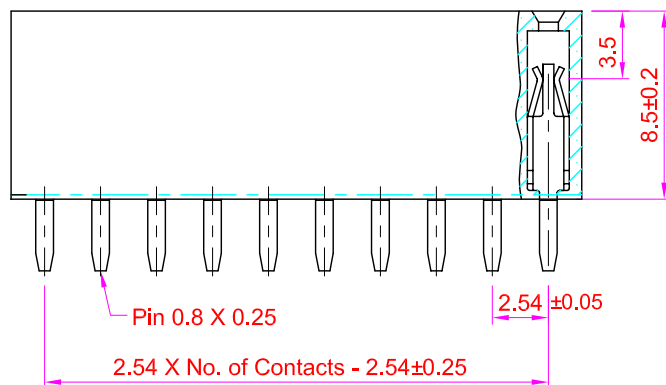

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.20

.XX ± 0.10

.XXX ±

ANG ±

PPOJECTION

照片框

#### ORDER INFORMATION

F-B65H85-2Xxx-LF  
SERIES | HIGH 8.5mm | BOTTOM BENTRY 6.5mm  
LEADFREE  
2X02:04WAY  
2X40:80WAY

DESCRIPTION: Female Header P:2.54 x 2.54 mm Profile : 8.5mm, Bottom Entry Type ,Dual Ro