


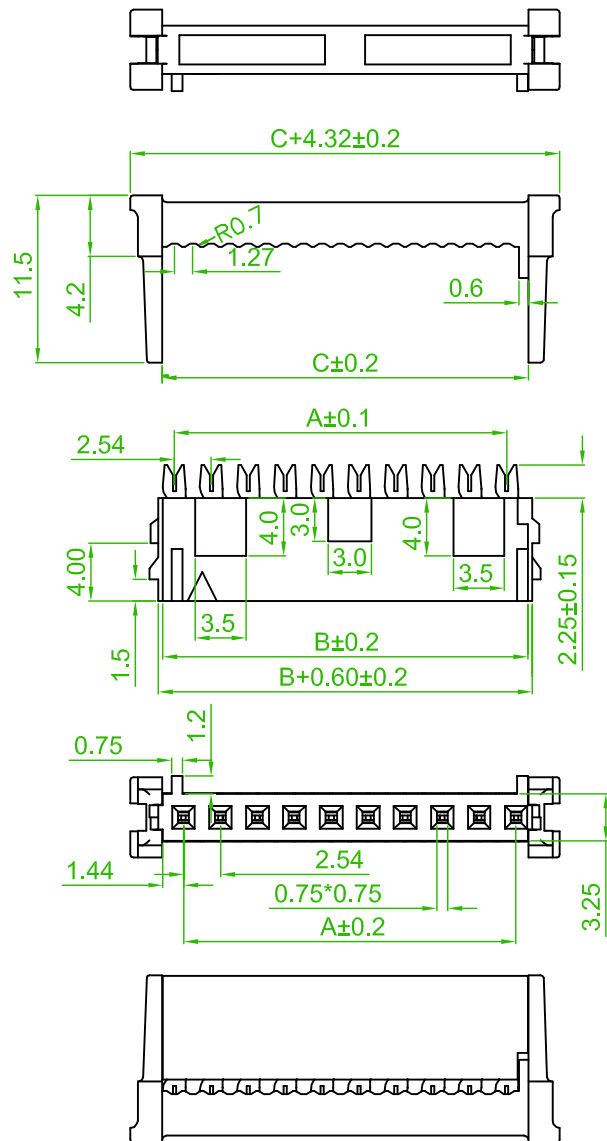

SPECIFICATION

Current Rate:1.0 AMP
Voltage Rate:250V AC/DC
Insulation Resistance:1000MΩ Min.
Contact Resisitance:20mΩ Max.
Withstanding voltage:500V AC/Minute
Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:PBT Glass Fiber , UL94V-0
Contact : Copper Alloy
Contact Plating:Gold-Plated Over Nickel.

PART NO	Dim. A	Dim. B	Dim. C
8P	17.78	20.02	20.10
10P	22.86	25.10	25.18
14P	33.02	35.26	35.34
16P	38.10	40.34	40.42
24P	58.42	60.66	60.74

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X ± 0.10
XX ± 0.05
XXX ±
ANG ± 2°

照片框

ORDER INFORMATION

F-C2-1Xxx-LF
SERIES LEADFREE
1X08:08 WAY
1X24:24 WAY
TWO TYPE

DESCRIPTION: IDC Socket 2.54mm Pitch