
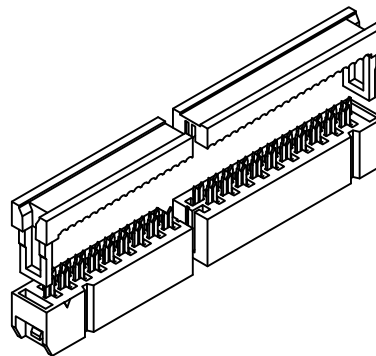
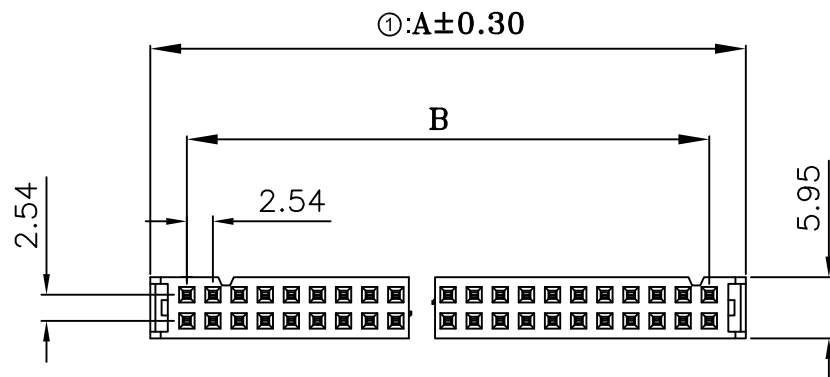
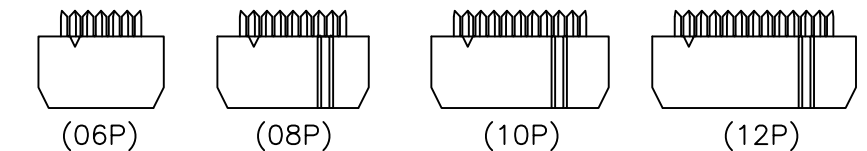

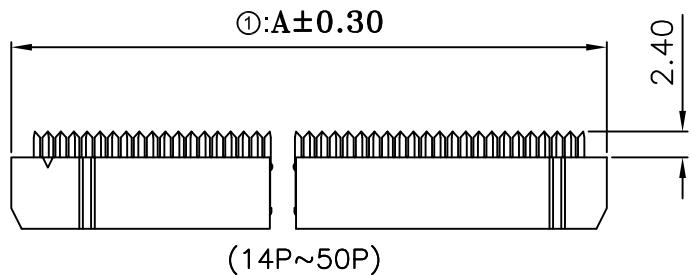



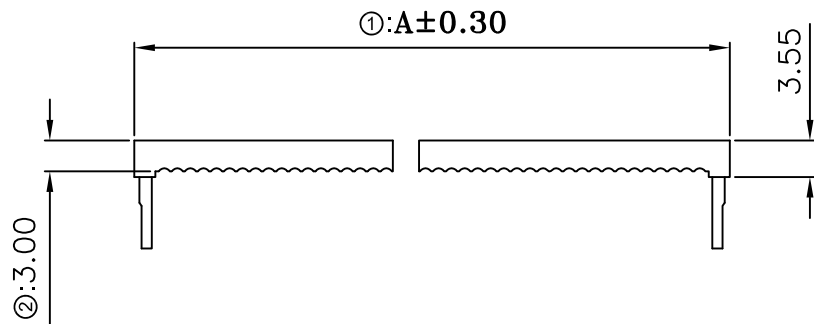

DIMENSION					
CONTACT	A	B	CONTACT	A	B
06P	12.18	05.08	20P	29.96	22.86
08P	14.72	07.62	24P	35.04	27.94
10P	17.26	10.16	26P	37.58	30.48
12P	19.80	12.70	30P	42.66	35.56
14P	22.34	15.24	34P	47.74	40.64
16P	24.88	17.78	40P	55.36	48.26
18P	27.42	20.32	50P	68.06	60.96

MATERIALS:
 INSULATOR: P.B.T.30%GLASS FIBER,UL94V-0
 CONTACT MATERIAL: BRASS OR PHOSPHOR BRONZE, GOLD FLASH OVER NICKEL

ELECTRICAL:
 CURRENT RATING: 1AMP DC
 INSULATION RESISTANCE: 3000M Ω MIN.
 CONTACT RESISTANCE: 30m Ω MAX.
 DIELECTRIC WITHSTANDING: 500V AC
 OPERATING TEMPERATURE: -40 $^{\circ}$ C~+105 $^{\circ}$ C
 TERMINATED WITH 1.27mm PITCH FLAT RIBBON CABLE.

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
 .X $\pm$ 0.30
 .XX $\pm$ 0.20
 .XXX $\pm$ 0.10
 ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION


F-C2XR-xx-LF
 SERIES | REEL | LEADFREE
 06~64WAY
 NON NOSE
 TWO TYPE

DESCRIPTION:

NOTE:

- 1.10 sprocket hole pitch cumulative tolerance±0.2
- 2.Carrier camber is 1mm in 100mm
- 3.A0 and B0 measured on a plane 0.3mm above the bottom of the pocket
- 4.K0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier
- 5.All dimensions meet EIA-481-2 requirements
- 6.13"1R= 5.5M 250PCS



CIRCUITS	W	B0	F
06 pin	32	12.5	14.2
08 pin	32	15.0	14.2
10 pin	44	17.6	20.2
12 pin	44	20.3	20.2
14 pin	44	22.6	20.2
16 pin	44	25.2	20.2
18 pin	56	27.7	26.2
20 pin	56	30.3	26.2
24 pin	56	35.3	26.2
26 pin	56	37.9	26.2
30 pin	72	43.0	34.2
34 pin	72	48.0	34.2
40 pin	88	55.7	42.2
50 pin	88	68.4	42.2

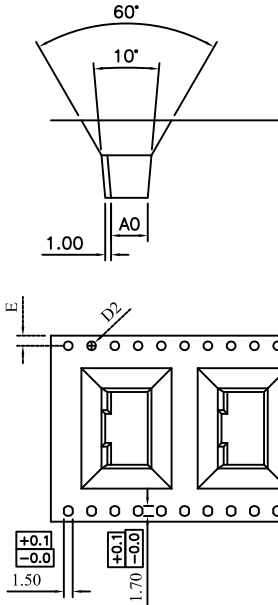




DEVICE TYPE: F-C2YXR-xx

MATERIAL :

ITEM	A0	K0	P	E	D2	P0	P2
DIM	6.3 ^{+0.1} _{-0.1}	13.3 ^{+0.1} _{-0.1}	20 ^{+0.1} _{-0.1}	1.75 ^{+0.1} _{-0.1}	1.5 ^{+0.1} _{-0.0}	4.0 ^{+0.1} _{-0.1}	2.0 ^{+0.1} _{-0.1}

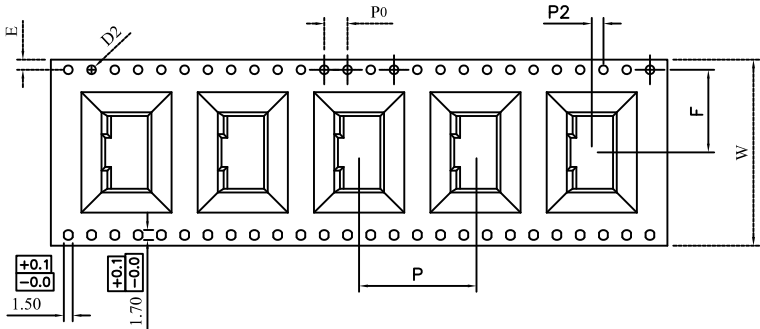

Dimension							Carrier Tape
A	B±0.5	C±0.2	D±1.0	N±1.0	T±0.1	G±0.1	W
330	2.2	13	20.2	100	8.5	13.1	8
330	2.2	13	20.2	100	12.5	17.1	12
330	2.2	13	20.2	100	17	21.1	16
330	2.2	13	20.2	100	24.5	29.1	24
330	2.2	13	20.2	100	32.5	37.0	32
330	2.2	13	20.2	100	44.5	49.1	44
330	2.2	13	20.2	100	56.5	61.1	56
330	2.2	13	20.2	100	72.5	77.1	72
330	2.2	13	20.2	100	88.5	93.1	88

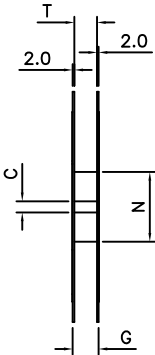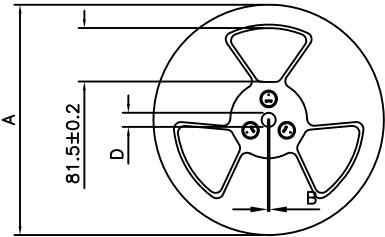

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

F-C2XR-xx-LF
SERIES
LEADFREE
06-64WAY
REEL
NON NOSE
TWO TYPE

DESCRIPTION: