


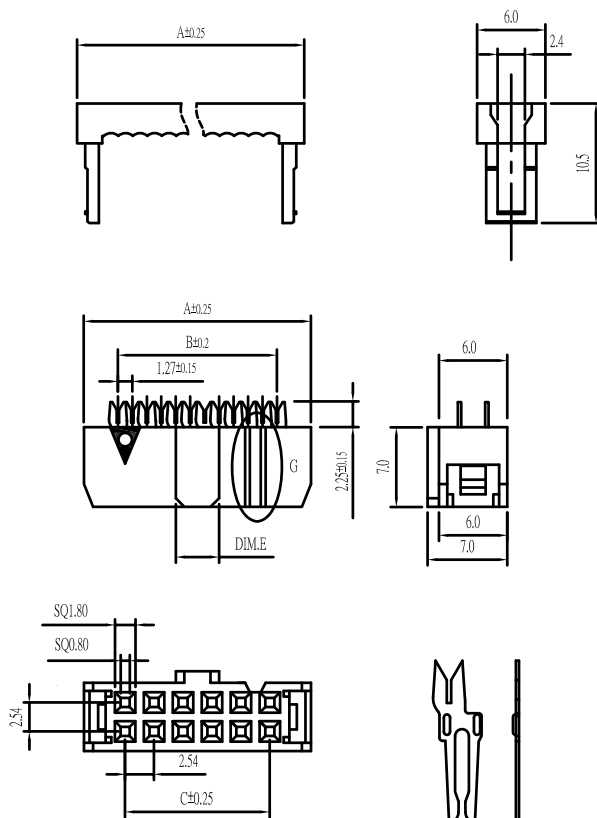

端子

Pos.	Dim.A	Dim.B	Dim.C	Dim.D	Dim.E
6	12.32	6.35	5.08		1.9
8	14.86	8.89	7.62		1.9
10	17.40	11.43	10.16		3.8
12	19.94	13.97	12.70		3.8
14	22.48	16.51	15.24		3.8
16	25.02	19.05	17.78		3.8
18	27.56	21.59	20.32		3.8
20	30.10	24.13	22.86		3.8
24	35.18	29.21	27.94		3.8
26	37.72	31.75	30.48		3.8
30	42.80	36.83	35.56		3.8
34	47.88	41.91	40.64		3.8
40	55.50	49.53	48.26		3.8
44	60.58	54.61	53.34		3.8
50	68.20	62.23	60.96		3.8
60	80.90	74.93	73.66		3.8
64	85.98	80.01	78.74		3.8

備注:

1. 不加反折為2件式。
2. 加括號尺寸為參考尺寸。
3. 未標示公差之尺寸參考公差表。
4. 6PIN有鼻膠芯G處兩邊都無凹槽，無鼻膠芯G處只有一邊有凹槽；
8/10/12PIN G處只有一邊有凹槽，14及14PIN以上G處兩邊都有凹槽。
5. A規格：6PIN有鼻膠芯G處只有一邊有凹槽。

*Material:

Insulator: PBT+Glass Fiber (UL94V-0).

Contact: Copper Alloy.

Contact Plated: Gold or Tin over Nickel Plated.

All material accord with ROHS。

*Specification:

Withstanding Voltage: AC 500V for 1 Minute.

Insulation Resistance: 100 MΩ Min. at DC 500V.

Contact Resistance: 1 Ω Max..

Operating Temperature: -40℃ --- +105℃.

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

F-C2Y-xx-LF
 SERIES | T | LEADFREE
 | | 06~64WAY
 | | Y TERMINAL
 | | TOW TYPE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
 .X ± 0.20
 .XX ± 0.10
 .XXX ± 0.05
 ANG ±

DESCRIPTION: