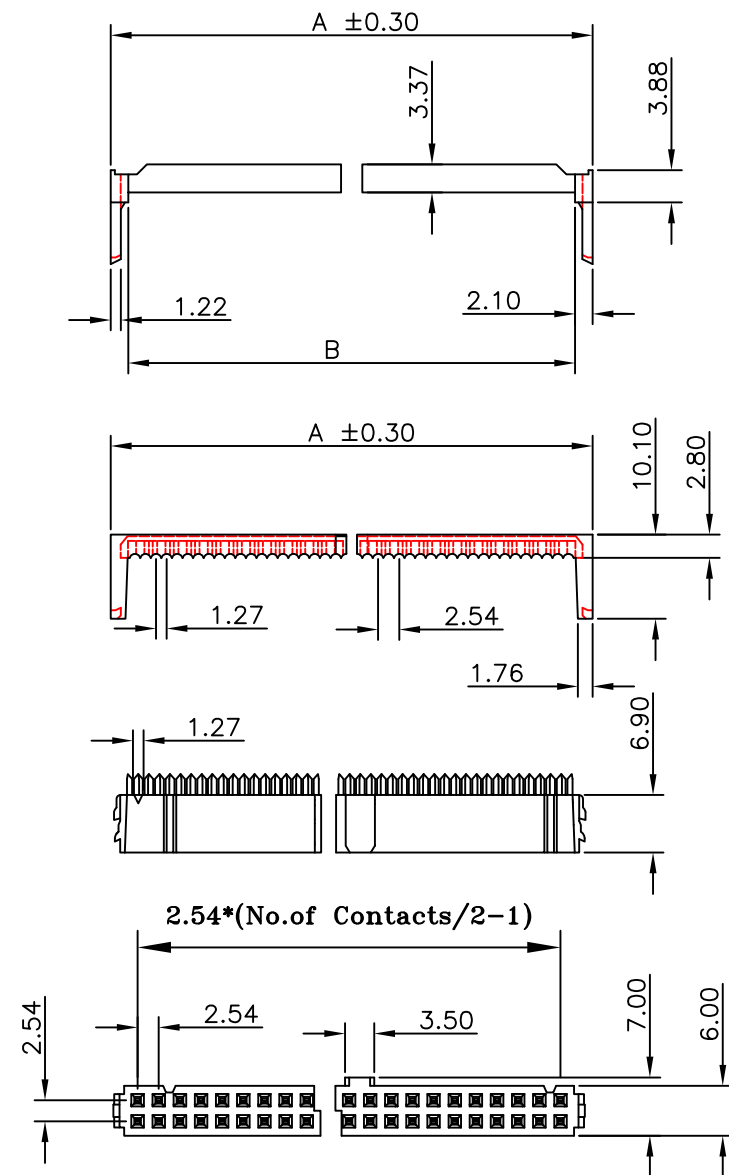


MATERIALS:
 INSULATOR: P.B.T. 30% GLASS FIBER, UL94V-0
 CONTACT MATERIAL: BRASS OR PHOSPHOR BRONZE, GOLD FLASH OVER NICKEL

ELECTRICAL:
 CURRENT RATING: 1 AMP DC
 INSULATION RESISTANCE: 3000MΩ MIN.
 CONTACT RESISTANCE: 30mΩ MAX.
 DIELECTRIC WITHSTANDING: 500V AC
 OPERATING TEMPERATURE: -40°C ~ +105°C
 TERMINATED WITH 1.27mm PITCH FLAT RIBBON CABLE.

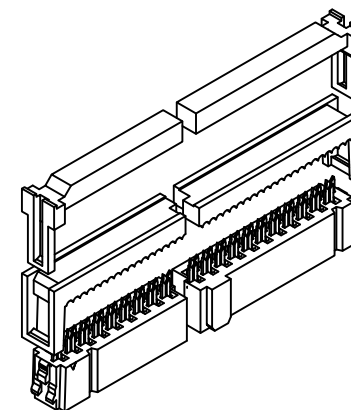


Table-1

CIRCUITS	A	B	CIRCUITS	A	B
10	17.24	13.04	32	45.18	40.98
14	22.32	18.12	34	47.72	43.52
16	24.86	20.66	40	55.34	51.14
20	29.94	25.74	50	68.04	63.84
24	35.02	30.82	60	80.74	76.54
26	37.56	33.36	64	85.82	81.62
30	42.64	38.44			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-C3B-xx-LF
 SERIES | LEADFREE
 10~64WAY
 BOX CONTACT
 THREE TYPE

DESCRIPTION: