


Material:
 Insulator: PBT+30% Glass Fiber (UL94V-0).
 Contact : Phosphor Bronze or Brass
 Contact Plated: Gold or Tin over Nickel Plated.
 Specification:
 Current Rating: 1 Amp.
 Withstanding Voltage: AC 500V for 1 Minute.
 Insulation Resistance: 1000MΩ Min. at DC 500V.
 Contact Resistance: 15mΩ Max..
 Operating Temperature: -40°C ~ +105°C.

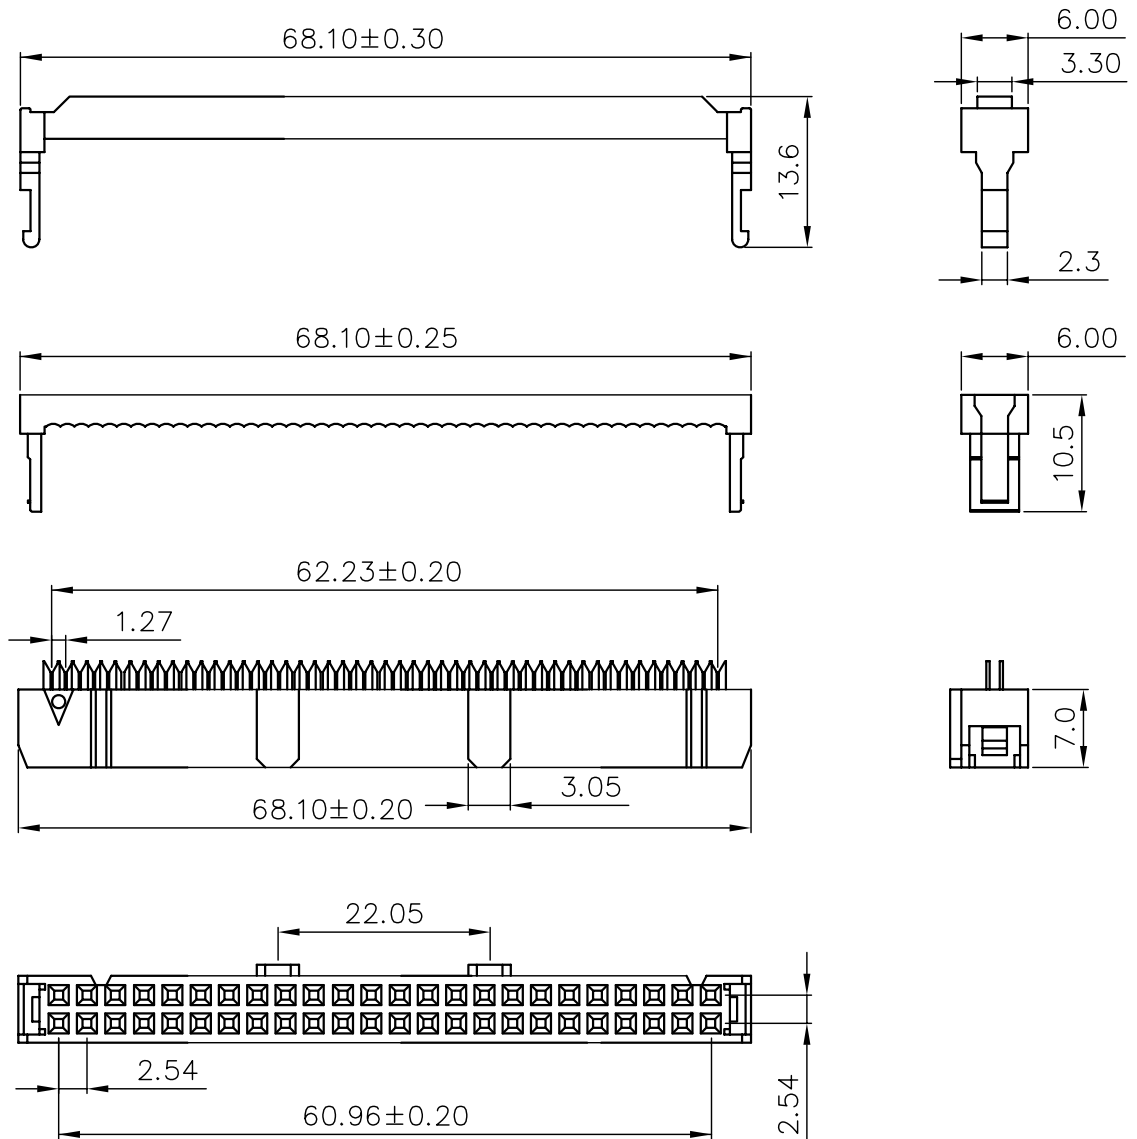

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

F-C3K2-50-LF
 SERIES | LEADFREE
 50 WAY
 TWO NOSE
 THREE TYPE

DESCRIPTION: 2.54mm IDC Connector 50H雙鼻