

Specifications:

Current Rating:1.0 Amp

Contact resistance:30m Ohm Max. at 6V DC 0.3A

Insulator resistance:1000M ohm min. at 500V DC

Withstanding Voltage:500V AC/Minute

Operating Temperature Range:-40°~+105°C

Wire Size Flat Cable I.D.C: 1.27mm Pitch

AWG#28(standard 0.20mm) OR #30 (0.17mm).

Material And Finish


Insulator:PBT&Glass-fiber reinforced UL94V-0

Insulator Color:Black or Gray

Contact:Phosphor Bronze or Brass

Contact Plating:See Contact Plating Tab.

Note:(*)Marked is Important DIM For QC.

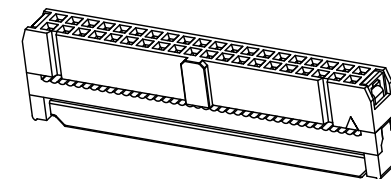

No. of Positions

No.	A	B	C	D	No.	A	B	C	D	No.	A	B	C	D
06	12.30	5.08	6.35	3.80	20	30.08	22.86	24.13	3.80	40	55.48	48.26	49.53	3.80
08	14.84	7.62	8.89	3.80	24	35.16	27.94	29.21	3.80	44	60.56	53.34	54.61	3.80
10	17.38	10.16	11.43	3.80	26	37.70	30.48	31.75	3.80	48	65.64	58.42	59.69	3.80
12	19.92	12.70	13.97	3.80	30	42.78	35.56	36.83	3.80	50	68.18	60.96	62.23	3.80
14	22.46	15.24	16.51	3.80	32	45.32	38.10	39.37	3.80	60	80.88	73.66	74.93	3.80
16	25.00	17.78	19.05	3.80	34	47.86	40.64	41.91	3.80	64	85.96	78.74	80.01	3.80
18	27.54	20.32	21.59	3.80	36	50.40	43.18	44.45	3.80					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

F-C3Y-xx-LF
SERIES | LEADFREE
06~64WAY
Y TERMINAL
THREE TYPE

DESCRIPTION: 2.54mm Pitch IDC Type "Y" Type Socket Series