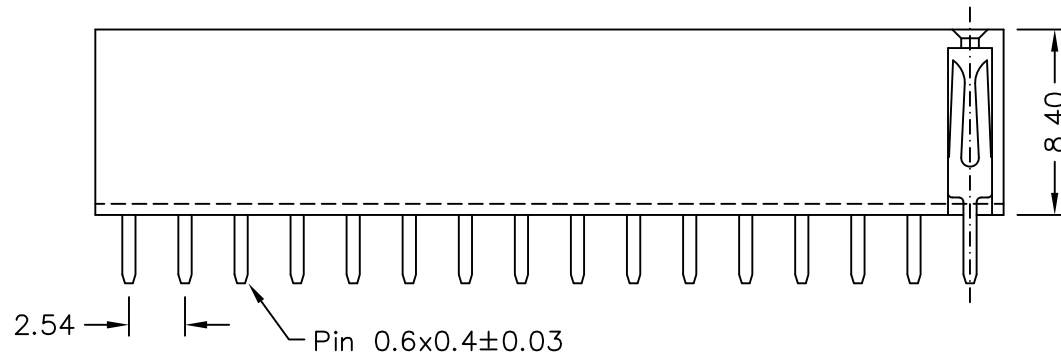
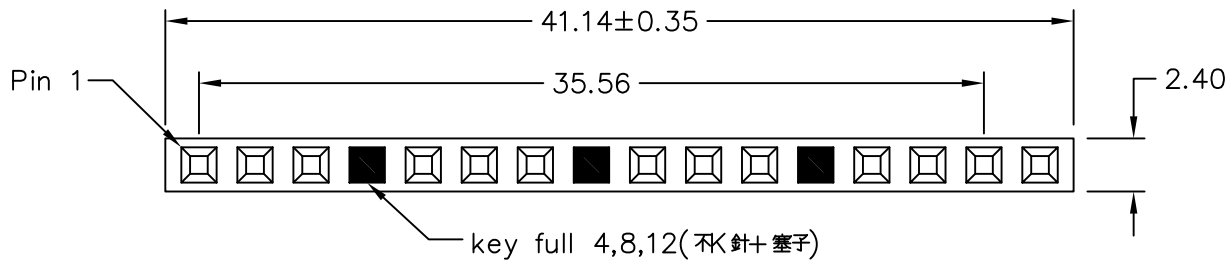


Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : $5000M\Omega$ Min.

Contact Resistance : $20m\Omega$ Max.

Dielectric Voltage : AC 500V for one minute

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$ 3°

ORDER INFORMATION

F-D-1X16K4812-LF
SERIES | LEADFREE
16 WAY
KEY 4.8.12 WAY
DIP 180°

DESCRIPTION:FEMALE HEADER 2.54*2.54mm STRAIGHT TYPE, SINGLE ROW HEIGHT 8.4mm