


**Specifications**

Current Rating: 3Amp  
 Insulation Resistance: 1000MΩMin.  
 Dielectric Withstanding Voltage: 600VAC  
 Contact Resistance: 20mΩMax.  
 Operating Temperature: -40°C to +105°C  
**Materials**  
 Contact Material: Phosphor Bronze  
 Insulator Material: Thermoplastic, UL 94V-0  
 PBT or the equivalent material

Recommended P.C.Board  
 Layout  
 (Tolerance: ±0.05)

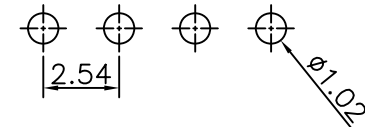

**RoHS Compliant**

TOLERANCES ARE



**煜倫股份有限公司**

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X. ± 0.30  
 .X ± 0.25  
 .XX ± 0.15  
 .XXX ± 0.10  
 ANG ±



**ORDER INFORMATION**

F-D0811-1Xxx-LF  
 SERIES | LEADFREE  
 1X02:02WAY  
 1X40:40WAY  
 DIP 180° | DIP 11.0mm  
 HIGH 8.5mm

DESCRIPTION: